



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification 7 :</b>  <b>G06F</b>	<b>A2</b>	<b>(11) International Publication Number:</b> <b>WO 00/50969</b>  <b>(43) International Publication Date:</b> 31 August 2000 (31.08.00)
<b>(21) International Application Number:</b> PCT/US00/04804  <b>(22) International Filing Date:</b> 25 February 2000 (25.02.00)  <b>(30) Priority Data:</b> '60/122,087                      26 February 1999 (26.02.99)                      US  <b>(71)(72) Applicants and Inventors:</b> HAUGLAND, Henry [US/US]; 24 Arbor Circle, Natick, MA 01760 (US). WOLLSCHLAGER, Linda [US/US]; 24 Arbor Circle, Natick, MA 01760 (US).  <b>(74) Agents:</b> PRICE, Robert, L., et al.; McDermott, Will & Emery, 600 13th Street, N.W., Washington, DC 20005-3096 (US).		<b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i>
<b>(54) Title:</b> MASS GENERATION OF INDIVIDUAL VIRTUAL SERVERS, VIRTUAL WEB SITES AND VIRTUAL WEB OBJECTS  <b>(57) Abstract</b>  <p>Techniques for inducing a contact to invoke a resource prepared by a promoter when the resource resides on a network, includes generating a resource location description for the resource. The resource location description includes a name of the contact. The promoter provides access to the resource at a location on the network according to the resource location description. The promoter also prepares a message to notify the contact about the resource location description for the resource. Thus a promoter (e.g., wholesaler, retailer, advocate, charity or politician) can provide a web site for each contact (e.g., customer, potential customer, viewer, supporter or voter) whom the promoter has identified. Each web site can have a domain name that prominently displays the contact's identity. The psychological benefit to the contact of finding a web site devoted to the contact and with the contact's own identity as part of the domain name conditions the contact favorably and increases the chances that the result sought by the promoter will be achieved.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

MASS GENERATION OF INDIVIDUAL VIRTUAL SERVERS,  
VIRTUAL WEB SITES AND VIRTUAL WEB OBJECTS

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims priority to U.S. Patent Application, filed February 25, 1999, by inventor Henry Haugland, entitled MASS GENERATION OF INDIVIDUAL WEB SITE" (Attorney Docket No. 53548-011).

FIELD OF THE INVENTION

5       The present invention relates to establishing servers on the Internet, and in particular to techniques for the automated generation of a large number of virtual servers for use as web sites and for providing other Internet services.

BACKGROUND OF THE INVENTION

10       The Internet refers to a worldwide network of networks. Information travels between computers connected to the Internet by a series of one or more packets of electronic signals. Each packet contains an address indicating the destination for the packet and contains information content or payload for use by special programs (servers) running on the device at the destination. A numeric address called an Internet Protocol address (IP address, also called Internet address) is used by equipment called routers, 15 bridges, or "brouters" comprising the Internet to direct packets to devices connected to the Internet. A domain name is a convenient way for human beings to remember and identify the location of services available from servers distributed over the Internet. Therefore, a device having an IP address on the Internet is frequently associated with one or more domains each with a unique domain name. Services available on the Internet include file 20 transfer using a file transfer protocol (FTP), electronic mail, and the World Wide Web.

      The World Wide Web (WWW) refers to a set of information files, called web pages, having standard formats such as the Hypertext Markup Language (HTML) and transmitted according to the HyperText Transfer Protocol (HTTP), and distributed across various computers connected to the Internet. A browser program (client) running on a 25 user computer connected to the Internet can request, receive, interpret and display the

information in a web page by exchanging packets over the Internet with a program (web server) running on a host computer where the web page resides. Web pages on the WWW are organized by web sites. Each web site is associated with a domain name on the Internet.

- 5           The Internet is a hierarchical network of networks, anticipating that a member of any network can itself be a network. Thus both the IP address and the domain name of web sites are organized into hierarchies.

          An IP address, in general, is a 32 bit number that includes a network number, a host number or "HOSTID", and a leading set of one or more bits indicating a convention for  
10   dividing the remaining bits between the network number and the computer number. It is useful to think of an IP address as identifying a particular physical connection to the Internet. In general, a particular physical device on the Internet has one or more IP addresses. The convention bits and the network numbers are administered by the Internet agencies. A given network having a network number (called here a local network) on the  
15   Internet controls the host numbers within the IP address that follow the network number of the local network. Since the host can itself be a network, the local network may allocate a range of host numbers for the network host to apportion to the various components of the host's network. The 32 bit IP address is often written as four 8-bit numbers (octets) separated by dots ".", where each octet is replaced by its decimal equivalent. The decimal  
20   range for an octet is 0 to 255. Plans and proposals exist to implement a 64 bit IP address structure. It is anticipated that the basic philosophy of operation will be consistent with the present 32 bit structure.

          The Domain Naming System (DNS) is an Internet service that associates a domain name with an IP address. The DNS is distributed over a set of one or more domain name  
25   servers (or simply name servers) running on computers connected to the Internet. The name servers are special programs running on certain computers having known IP addresses. The name servers maintain records associated with a particular domain name. The DNS requires that a unique domain name be associated with a particular IP address. Several domain names can be associated with the same IP address; but a unique domain  
30   name can not be associated with multiple IP addresses. Thus the DNS system provides a many-to-one or a one-to-one mapping from domain names to IP addresses.

With this convention, a user can indicate a web site by its associated domain name, and the DNS can be utilized to map the domain name to an IP address. The packets are then routed using the IP address. At the destination domain server, running on the computer at the IP address uniquely identified by the domain name, other information in the packet can be used to determine how the packet is processed. The DNS system allows a user of the Internet to retain a DNS name even though the physical device or its physical connection to the Internet, hence its IP address, changes. This is done by modifying the IP address associated with a DNS name on the proper name server.

According to the DNS, a domain includes the form

10 SLDname.TLDname

where TLD indicates a top level domain, and SLD indicates a second level domain (also sometimes called a primary domain). Currently there are at least five international top level domain names including "com", "edu", "int", "org", and "net" and two other TLD names used without country codes "gov", and "mil". Country specific top level domain names include for example, "us" and "uk" for the United States and Great Britain. The bodies that determine conventions used on the Internet and by the DNS are considering adding additional top level international domain names. The SLD to the left of the period, is a unique name (within a given TLD) as registered with the DNS. The portion of a domain name to the left of the ".TLDname" is referred to as the host name since it identifies a specific host where a server can reside. The DNS is responsible for mapping the SLDname.TLDname to an IP address of a computer running the domain server. Every registered SLD name has an entry in one of thirteen (13) "root name servers" that contains the physical IP addresses of two or more name servers responsible for translating a host name with that SLD name to an IP address.

25 The DNS is hierarchical and allows domain names to be constructed with multiple levels. However, the maintenance of the domain names and mapping to IP addresses of each additional level is the responsibility of a name server, typically the domain name server. In general, a domain name has the form:

... 3LDname.SLDname.TLDname

30 where 3LD refers to a third (3<sup>rd</sup>) level domain name and the ellipses indicates that additional levels can be added to the left. The levels are separated by dots "." and level

order increases to the left. Uniqueness of a domain name is assured if each name at a given level is different from every other name at that level. The same name can be used in different levels.

- For example, a device identified by the SLD name "CollegeUniversity" and TLD
- 5 "edu" can refer to a particular computer of the College University computer system. The particular computer has a particular IP address, say 111.255.55.01, at which it is connected to the Internet, and this particular computer runs a SLD domain server. Various computers and storage devices distributed over various departmental computer centers are connected to the domain server computer in a local network. The main computer in the physics
- 10 department computer center of the above College University might have the IP address 111.255.55.05 and can be identified by the subdomain name "physics" and therefore has the full domain name of "physics.CollegeUniversity.edu". Similarly, the psychology department computer center may have the IP address of 111.255.55.10 and domain name "psychology.CollegeUniversity.edu". The network administration authority at
- 15 CollegeUniversity.edu must establish and maintain name servers that map "physics.CollegeUniversity.edu" and "psychology.CollegeUniversity.edu" to their respective IP addresses. At the next level, the Astronomy section's graphics engine computer with IP address 111.255.55.07 connected to the physics computer center main computer can be identified by the fourth level name "astronomygraphics" of the third level
- 20 domain "physics." The full domain name of this computer would be "astronomygraphics.physics.CollegeUniversity.edu". The mapping of fourth level domain name "astronomygraphics" to its IP address is the responsibility of the name servers set up for the "CollegeUniversity.edu" domain which may or may not be the same as the SLD name servers.
- 25 A level of domain names need not be associated with a particular portion of the IP address. That is, a SLD name need not be associated with a particular local network, as in the above example, but instead can refer to a particular computer or host number within a local network. For example, if an Internet service provider (ISP) named Happynet has a local network number of 222.233.44 and several computers with host numbers of .00
- 30 through .25, an SLD domain server can be established on the single computer having an IP address of 22.233.44.00 with a SLD name "Happynet1" and a SLD domain server can be

established on the single computer having an IP address of 222.233.44.17 with a SLD name "JoeDoe" . Thus the same local network can have different SLD names.

While the IP address refers to physical connection to the Internet. The domain levels beyond the SLD name need not refer to physically distinct devices. They can simply refer to different server programs running on the same processor or set of processors. The multiple server programs running on the same set of one or more processors are called virtual servers. In most computer operating systems, virtual servers are high level systems objects. The domain administrator maintains a local name server that associates the name of each virtual server with its local IP address. The local name server may or may not be the same as the SLD name server. Each virtual server that resides on a particular physical device is given one IP address of the one or more IP addresses identifying that particular physical device. An additional database, usually established by the operating system of the device, associates the virtual server with a lengthy list of rights and privileges including a home directory on a storage device accessible by the virtual server.

To provide WWW services, the domain server must contain a web page that is first displayed to a user whose browser requests a connection to that domain web server. If a particular web page is not specified in the request or by the domain server, the user's browser is presented with the contents of a default page from the home directory having a file name often containing "home", such as "home.htm" or "home.html". The default file can have any name identified in setting up the virtual server system object.

Computer resources are associated with a server and are accessed by the server program. Computer resources include functions or buffers in peripheral devices like printers and scanners, memory media locations such as volatile random access memory (RAM) registers and non-volatile disk drive files, and other application programs such as spreadsheets, word processors, file management, financial services, trading on an exchange, network telephony, and many other known or emerging network applications. The naming convention followed on the Internet for specifying a service, a location and resource is called the Universal Resource Locator (URL). The URL form for identifying a resource is as follows:

ServiceDomainNameResource

File resources are specified by the directory and filename. Directory levels are separated by slashes "/" with level order increasing to the right. The file name appears to the right of the last slash. Service indicates how the resource is transferred and handled, for example whether FTP or HTTP protocols are used to transfer the resource.

- 5       The WWW follows this convention for identifying web pages. In the URL for a web page, the Service is specified by "http://www." The DomainName is the domain name where a web server can be found, i.e. the domain name specifies a web site. The Resource specifies the file name which is the web page to be displayed on the user's browser. The filename is optional; if not specified the file name "home.htm" or  
10 "home.html" is used as a default name.

Two characteristics of a web site then are (1) a URL address, including a domain name with a SLD name maintained on a registry of the DNS, and (2) a home page file written in a hypertext markup language (HTML) residing in a home directory.

- In use, the World Wide Web has become a popular medium for exchanging  
15 information among users of the Internet. Corporate and retail entities that wish to project an image of availability and accessibility often establish web sites with domain names related to their trade names. Internet users have come to associate a name in a web site's domain name as a commanding presence on the World Wide Web.

- In a typical procedure, an promoter (e.g., a wholesaler, a retailer, a service provider,  
20 an advocate, a publicist or a politician) establishes a web site to reach targets (e.g., known contacts such as former customers, registered voters, residents of an area, referrals, purchased lists and unknown persons). The promoter then attempt to induce the targets to visit the web site by publishing or otherwise advertising the domain name of the web site. To reduce the amount the target must remember, the promoter may leave off the service  
25 prefix "http://" or "www" or both and omit the web page filename, relying on the default page name. Many inducements have been tried to lead the target to visit the web site. Without sufficient target visits and activity at the web site established by the promoter, the expense and effort of establishing the web site is wasted.

- The process of establishing a web site involves registering the SLD name with an  
30 authorized agency ( a registry) for the TLD and then establishing a domain server on a machine connected to the Internet, or connecting a machine to the Internet. The SLD



registration process typically involves manual steps and the payment of fees. For example, registering a SLD on the "com" TLD involves:

- finding a unique name not already registered ( manual and tedious task since many short and simple names have already been registered);
- 5     • identifying primary and secondary name servers for storing the SLD name;
- obtaining a registration agreement from a ".com" registry;
- manually filling out the registration agreement;
- sending agreement to registry with registration fee (about \$50 a year);
- responding to errors in the agreement identified by the registry;
- 10    • receiving notification that agreement is processed; and
- waiting for registry to enter records into databases used by SLD name servers.

The information presented to the contact at the web site can be tailored in response to input provided by the contact such as by the contact's clicking on a product of interest. Delivery of product to a contact who places an order then requires the contact identify  
15 himself or herself and authorize payment either by making further entries through one or more dialog boxes, or by reliance on files (e.g., cookies) created by the server and stored on the contact's computer in a previous interaction between the contact and web site server, and retrieved by the web site server in subsequent interactions.

Promoters do not establish individual web sites for each of hundreds of targets, or  
20 more, without action by the target. The process of establishing a web site involves several manual steps, expense and delays as a SLD is registered and then additional effort as local name servers are configured and home page content is created. In addition, since few people would be motivated to visit such a web site, the promoter expects little financial return compared to the effort and expense expended in establishing such a web site.

25     What is needed are techniques to encourage contacts to invoke resources on a network, such as web pages at web sites, generated by a promoter.

In addition, techniques are needed to establish servers, such as web servers for web sites, on the network in bulk, cheaply enough to cost less than the expected gain obtained during use of resources on those servers.

30

## SUMMARY OF THE INVENTION

Several techniques of the current invention are directed to inducing contact activity at servers on a network by including contact name within resource location descriptions.

Some techniques of the current invention are also directed to automatically  
5 providing a large number of contact-specific servers, or resources, or both, that may be tailored for the contact without requiring action by the contact.

Some techniques of the current invention also apply to supplying web services by domain servers having contact-specific domain names.

One advantage of techniques from the present invention is that a promoter (e.g.,  
10 wholesaler, retailer, advocate, charity or politician) can provide a large number of web sites, one for each contact (e.g., customer, potential customer, viewer, supporter or voter) whom the promoter has identified. Each web site can have a domain name that prominently displays the contact's identity. The psychological benefit to the contact of finding a web site devoted to the contact and with the contact's own identity as part of the  
15 domain name conditions the contact favorably and increases the chances that the result sought by the promoter will be achieved. For example, anecdotal evidence suggests that a contact exhibits a high probability of visiting a web site with a domain name bearing the contact's identity, when notified of the existence of the web site. Furthermore, a sale is completed a high percentage of times in such visits. Similarly, it is expected that such a  
20 contact will more likely make a donation to a charity when that charity establishes a web site bearing the contact's identity and relating the charity's work to the contact's concerns. As another example, it is expected that a voter will more likely vote for a politician who establishes a web site with the voter's identity relating the politician's position to the voter's activities.

25 According to one technique of the present invention for inducing a contact to invoke a resource prepared by the promoter on a network, the promoter generates a resource location description for the resource. The resource location description includes a name of the contact. The promoter also provides access to the resource at a location on the network according to the resource location description. The promoter also prepares a  
30 message to notify the contact about the resource location description for the resource.

According to a technique of the present invention for inducing a contact to visit a web site prepared by a promoter, the promoter generates a host name for the web site. The host name includes a name of the contact. The promoter notifies the contact of the host name for the web site, and configures a web server at the web site to process a request  
5 including the host name.

According to another technique of the present invention, a plurality of virtual servers are automatically generated on a set of one or more physical devices on a network. Each device has a network address. A database of information for a promotion is set up. A plurality of host names are generated for at least one physical device of the set of one or  
10 more physical devices. A particular host name includes information from the database and a domain name for a particular physical device. A name server is automatically configured to provide a particular network address of the particular physical device in response to requests to connect to the particular host name.

According to another technique of the present invention, content for a plurality of  
15 resources are automatically generated. The resources have corresponding resource location descriptions on a single physical device having a network address. A server for the physical device is configured to resolve all requests for service directed to the resource location descriptions by opening a certain file on a certain directory of the physical device.

According to another technique of the present invention, web content is  
20 automatically generated for a plurality of virtual web servers. The virtual web servers have corresponding host names on a single physical device having a network address. A web server for the physical device is configured to resolve all requests for service at the virtual web servers by opening a certain file on a certain directory of the physical device.

According to a technique of the present invention for conducting a promotion, a  
25 name of the promotion is included in a network address associated with the promotion. The network address is broadcast to targets.

According to a technique of the present invention for automatically generating a plurality of virtual servers on a set of one or more physical devices on a network; each device has a network address. A plurality of host names is automatically generated for at  
30 least one physical device of the set of one or more physical devices. A name server is automatically configured to provide, in response to requests to connect to a particular host,

a particular network address of a corresponding physical device, and a time to live which is shorter than a time to live stored by the name server.

According to another aspect of the present invention, a computer-readable medium bears promotion information for use by one or more processors that are participating in  
5 providing resources on a network. The promotion information comprises contact information about a contact to receive materials as part of a promotion. The promotion information also includes a resource location description indicating where the resource can be accessed on the network. The resource location information includes information from the contact information.

## 10 BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings and in which like reference numerals refer to similar elements and in which:

Figure 1 is a block diagram that illustrates a computer system 100 upon which an  
15 embodiment of the invention may be implemented.

Figure 2 is a block diagram of a domain server on a network with a distributed domain name system for mapping domain names to hardware addresses upon which an embodiment of the invention may be implemented.

Figures 3A and 3B are flow diagrams for generating web sites according to an  
20 embodiment of the present invention.

Figures 4A and 4B are flow diagrams for details of step 330 from Figure 3A for generating multiple unique domain names according to one embodiment of the present invention.

Figure 4C is a flow diagram for details of step 424 from Figure 4A for modifying a  
25 virtual subdomain name according to one embodiment of the present invention.

Figure 5A is a block diagram of example records and fields in a contact database as updated in step 340 of Figure 3A according to an embodiment of the present invention.

Figure 5B is a flow diagram for details of step 310 of Figure 3A for updating second level domain name servers according to an embodiment of the present invention.

Figure 5C is a flow diagram for details of step 340 of Figure 3A for updating local domain name servers according to an embodiment of the present invention.

Figures 6A and 6B are block diagrams showing contents of a cache on a user's domain name server before and after a request for connection to a virtual server as a result  
5 of step 345 of Figure 3A according to an embodiment of the present invention.

Figure 7A is a block diagram of a home page file produced on a domain server during step 350 of Figure 3B according to an embodiment of the present invention.

Figure 7B is an illustration of a home page presented to a user in response to a web request to a virtual server during step 370 of Figure 3B according to an embodiment of the  
10 present invention.

Figure 8 is a flow diagram for processing and monitoring requests for service to a virtual server during step 370 of Figure 3B according to an embodiment of the present invention.

Figure 9 is a block diagram of connections for processing a credit card purchase on  
15 a domain server according to an embodiment of the present invention.

Figure 10 is a flow chart for generating URLs with contact specific information in the resource directory name, according to another embodiment of the present invention..

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Techniques for inducing visits to a promoter's web site, producing virtual servers in  
20 bulk, and providing contact-specific content on bulk produced virtual servers are described. In the following description, for the purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be apparent, however, to one skilled in the art that the present invention may be practiced without these specific details. In other instances, well-known structures and devices are  
25 shown in block diagram form in order to avoid unnecessarily obscuring the present invention.

For example, the Internet, as used herein, is one example of a network of networks. The invention is not limited to the Internet. The IP address is an example of a network address and hardware physical location code for devices on a network of networks like the  
30 Internet, including future extensions of the IP address standards, such as an expansion to

64 bits. The URL is a specific example of a general resource location description and a general document location description for a network or a network of networks.

### HARDWARE OVERVIEW

5        Figure 1 is a block diagram that illustrates a computer system 100 upon which an embodiment of the invention may be implemented. Computer system 100 includes a bus 102 or other communication mechanism for communicating information, and a processor 104 coupled with bus 102 for processing information. Computer system 100 also includes a main memory 106, such as a random access memory (RAM) or other dynamic storage device, coupled to bus 102 for storing information and instructions to be executed by  
10        processor 104. Main memory 106 also may be used for storing temporary variables or other intermediate information during execution of instructions to be executed by processor 104. Computer system 100 further includes a read only memory (ROM) 108 or other static storage device coupled to bus 102 for storing static information and instructions for  
15        processor 104. A storage device 110, such as a magnetic disk or optical disk, is provided and coupled to bus 102 for storing information and instructions.

Computer system 100 may be coupled via bus 102 to a display 112, such as a cathode ray tube (CRT), for displaying information to a computer user. An input device 114, including alphanumeric and other keys, is coupled to bus 102 for communicating  
20        information and command selections to processor 104. The input device 114 may also comprise voice actuated input device or any device converting sound to input signals. Another type of user input device is cursor control 116, such as a mouse, a trackball, or cursor direction keys for communicating direction information and command selections to processor 104 and for controlling cursor movement on display 112. This input device  
25        typically has two degrees of freedom in two axes, a first axis (e.g., x) and a second axis (e.g., y), that allows the device to specify positions in a plane.

The invention is related to the use of computer system 100 for producing virtual servers on the Internet in bulk, and for providing virtual server host names or content or both that are contact specific. According to one embodiment of the invention, virtual  
30        server host names are provided by computer system 100 in response to processor 104 executing one or more sequences of one or more instructions contained in main memory

106. Such instructions may be read into main memory 106 from another computer-readable medium, such as storage device 110. Execution of the sequences of instructions contained in main memory 106 causes processor 104 to perform the process steps described herein. In alternative embodiments, hard-wired circuitry may be used in place of  
5 or in combination with software instructions to implement the invention. Thus, embodiments of the invention are not limited to any specific combination of hardware circuitry and software.

The term "computer-readable medium" as used herein refers to any medium that participates in providing instructions to processor 104 for execution. Such a medium may  
10 take many forms, including but not limited to, non-volatile media, volatile media, and transmission media. Non-volatile media includes, for example, optical or magnetic disks, such as storage device 110. Volatile media includes dynamic memory, such as main memory 106. Transmission media includes coaxial cables, copper wire and fiber optics, including the wires that comprise bus 102. Transmission media can also take the form of  
15 acoustic or light waves, such as those generated during radio-wave and infra-red data communications.

Common forms of computer-readable media include, for example, a floppy disk, a flexible disk, hard disk, magnetic tape, or any other magnetic medium, a CD-ROM, any other optical medium, punchcards, papertape, any other physical medium with patterns of  
20 holes, a RAM, a PROM, and EPROM, a FLASH-EPROM, any other memory chip or cartridge, a carrier wave as described hereinafter, or any other medium from which a computer can read.

Various forms of computer readable media may be involved in carrying one or more sequences of one or more instructions to processor 104 for execution. For example,  
25 the instructions may initially be carried on a magnetic disk of a remote computer. The remote computer can load the instructions into its dynamic memory and send the instructions over a telephone line using a modem. A modem local to computer system 100 can receive the data on the telephone line and use an infra-red transmitter to convert the data to an infra-red signal. An infra-red detector can receive the data carried in the infra-  
30 red signal and appropriate circuitry can place the data on bus 102. Bus 102 carries the data to main memory 106, from which processor 104 retrieves and executes the instructions.

The instructions received by main memory 106 may optionally be stored on storage device 110 either before or after execution by processor 104.

Computer system 100 also includes a communication interface 118 coupled to bus 102. Communication interface 118 provides a two-way data communication coupling to a  
5 network link 120 that is connected to a local network 122. For example, communication interface 118 may be an integrated services digital network (ISDN) card or a modem to provide a data communication connection to a corresponding type of telephone line. As another example, communication interface 118 may be a local area network (LAN) card to provide a data communication connection to a compatible LAN. Wireless links may also  
10 be implemented. In any such implementation, communication interface 118 sends and receives electrical, electromagnetic or optical signals that carry digital data streams representing various types of information.

Network link 120 typically provides data communication through one or more networks to other data devices. For example, network link 120 may provide a connection  
15 through local network 122 to a host computer 124 or to data equipment operated by an Internet Service Provider (ISP) 126. ISP 126 in turn provides data communication services through the world wide packet data communication network now commonly referred to as the "Internet" 128. Local network 122 and Internet 128 both use electrical,  
electromagnetic or optical signals that carry digital data streams. The signals through the  
20 various networks and the signals on network link 120 and through communication interface 118, which carry the digital data to and from computer system 100, are exemplary forms of carrier waves transporting the information.

Computer system 100 can send messages and receive data, including program code, through the network(s), network link 120 and communication interface 118. In the Internet  
25 example, a server 130 might transmit a requested code for an application program through Internet 128, ISP 126, local network 122 and communication interface 118. In accordance with the invention, one such downloaded application provides for receiving input from a user of a web page with contact specific content or host name or both, as described herein.

The received code may be executed by processor 104 as it is received, and/or stored  
30 in storage device 110, or other non-volatile storage for later execution. In this manner, computer system 100 may obtain application code in the form of a carrier wave.



## OVERVIEW OF A DISTRIBUTED NAMING SYSTEM

Figure 2 is a block diagram showing components of a distributed naming system on a network like the Internet. The conventional process for obtaining services over a network like the Internet is to direct a request for service from a user computer 220 to a service providing program, called a server, on a particular hardware device, e.g. 280. The request travels from the user computer 220 over link 271 to the network 210 and then over link 279 to the physical device 280. The network identifies link 279 to device 280 with a network address, such as the Internet IP address. The IP address consists of 32 bits usually represented by four octets of eight bits each separated by dots, where the value of each of the eight bit octets is represented by a decimal number between 0 and 255. For purposes of illustration, we will say that device 280 has an IP address of w.x.y.z1 where w, x, y and z1 represent particular decimal values between 0 and 255, inclusive. For user on computer 220 to obtain services from the device 280, the request from 220 must indicate the IP address w.x.y.z1. In general, however, the user does not know the IP address of device 280, but, instead, knows the domain name, e.g. "www.HotTime.com" for the service provided by device 280. In addition, device 280 may provide a range of several services by running several different server programs (servers) on its hardware. Each of these different servers can have different domain names and appear to the user at computer 220 to be separate devices. These servers are called virtual servers 260 because they appear to be servers running on separate hardware devices even though they are on a single hardware device. To reach any of the virtual servers 260 on device 280, the user on computer 220 must then request one of the IP addresses of the hardware device 280, e.g., u.x.y.z1. However, in general, a user at computer 220 first learns the domain name of a server on the hardware device 280 or the virtual servers 260 and does not know the association of virtual servers to hardware or the IP addresses of the hardware. A domain name service maps a known domain name to a network address, such as an IP address.

The domain naming system (DNS) of the Internet authorizing agencies will be described as an example of a general naming system. In this system, when a user at 220 wants to connect to a particular domain name, e.g. physics.CollegeUniversity.edu, a request for connection to physics.CollegeUniversity.edu is sent over link 271 to a particular hardware device 230 running the domain name server for the user of computer

220. When the user's computer 220 is configured for connection to the network 210, a record is placed in a file on the user's computer 220. Among other items, the record contains the IP address of the hardware 230 running the domain name server for the user of that computer 220. This record on computer 220 contains the IP address of hardware  
5 device 230, e.g. q.r.s.t, where q, r, s, and t represent particular decimal values between 0 and 255, inclusive. The request to connect to physics.CollegeUniversity.edu is sent to device 230 for processing by the domain name server residing there. If the server on hardware device 230 has not recently or ever processed a request for connection to physics.CollegeUniversity.edu, then the name server on device 230 does not know the IP  
10 address of physics.CollegeUniversity.edu. The name server on device 230 knows at least the IP address of a root name server (not shown). The root name server (not shown) knows the IP addresses of several top level domain name (TLD) name servers. This information is in domain name files residing on hardware devices 240. For this example, hardware device 241 contains the name server for the TLD name ".com" and hardware device 241  
15 has an IP address of a1.b1.c1.d1. Hardware device 242 with an IP address of a2.b2.c2.d2 has the TLD name server for ".edu." Similarly, there are hardware devices with known IP addresses running name servers for the other TLD names. For this example, hardware device 230, the domain name server for user computer 220, has previously obtained the IP address a2.b2.c2.d2 of hardware device 242 which runs the name server for .edu from  
20 previous requests processed by the name server on hardware device 230. Then the domain name server on 230 sends a request to IP address a2.b2.c2.d2 which arrives at the hardware device 242 along link 274 and is processed by the TLD name server resident there. The TLD name server on device 242 responds with a message addressed to the name server on 230 that says the second level domain (SLD) name server for CollegeUniversity.edu is  
25 hardware device 254 with IP address w.x.y.z0. The domain name server on hardware device 230 then sends a message to hardware device 254 requesting the IP address of the computer with the name server for physics.CollegeUniversity.edu. The server on computer 254 responds that the name server for physics.CollegeUniversity.edu is hardware device 280 with IP address w.x.y.z1. The domain name server on device 230 then sends a message  
30 to device 280 at IP address w.x.y.z1 requesting the IP address of the machine with the domain server for physics.CollegeUniversity.edu. The name server on device 280 then

responds with the needed IP address. If the domain server for physics.CollegeUniversity.edu is running on a stand alone computer, for example, hardware device 252, then the name server on device 280 will return the IP address of 252, e.g. w.x.y.z9. But if the domain name physics.CollegeUniversity.edu is a virtual server, e.g. virtual server 262 running on device 280, then the IP address of this virtual server 262 is one of the one or more IP addresses of the hardware device 280, e.g., w.x.y.z1. This whole process may take just a few seconds.

When the name server on device 230 receives this information, it will save the information in its memory for a certain amount of time dependent on a parameter called time to live (TTL) provided by the name server on device 280 with the message providing the IP address of domain physics.CollegeUniversity.edu. The domain name server on device 230 then sends a message to the user computer 220 that physics.CollegeUniversity.edu can be found at the IP address returned, e.g. w.x.y.z1.

In the following examples, the computer 220 will continue to represent the user's computer, the domain name server for the user's computer will continue to reside in hardware device 230, and devices 240 will continue to represent TLD name servers. Devices 252 and 254 represent primary and secondary name servers for the SLD names associated with destination servers. Device 281 represents one of the destination SLD servers whose address is stored on the SLD name servers 252 and 254. Virtual servers 260 run on hardware device 280. Other virtual servers on device 280 are represented by the ellipses adjacent to virtual server 264. Other destination SLD servers whose addresses are stored on name servers 252 and 254 are represented by the ellipses adjacent to device 280.

## FUNCTIONAL OVERVIEW

Figures 3A and 3B are flow diagrams for generating web sites according to an embodiment of the present invention. The same process can be used to generate virtual servers for any network service including ftp file transfer and email, and is not confined to World Wide Web services. When providing web services, a virtual server is a web site. The web site example is explained as a way of illustrating details of a particular embodiment of the current invention.

Conventional methods are used to set up SLD servers and SLD name servers. A set of one or more SLD servers are needed to practice the invention. The virtual servers of the present invention will be generated on the set of one or more SLD servers. Step 310 represents following conventional procedures for establishing a set of one or more SLD  
5 servers and registering their domain names with the TLD registry. For purposes of this example, four SLD names are registered with TLD registry.com: sld2, sld3, sld4 and sld5. These four SLD servers can be distributed over one through four physical devices. In one embodiment, each SLD server resides on a different physical device with a different IP address. For this example, however, two SLD servers will reside on one physical device  
10 with an IP address of w.x.y.z1 and two SLD servers will reside on a second physical device with IP address of w.x.y.z4. This is done to illustrate that the number of SLD servers available for managing the large plurality of virtual servers is variable compared to the number of physical devices. For a particular embodiment, the choice of number of SLD servers on each physical device will be determined by promoter preferences and  
15 performance issues of the various processors. None of the physical devices listed by the SLD name servers need have a domain name, and in this embodiment neither does, because they are identified directly by their IP address in the appropriate SLD name server.

In step 320, a promotional or project database is established. This step can be accomplished as simply as importing a database provided by client of the promoter to one  
20 of the physical devices in the set. Alternatively, the project database can be formed by keying information into a database. In another alternative, software programs can be written to read lists or flat files and to import that information into a database structure that can respond to queries. In the embodiment described here, the promotional database includes information about contacts known to the promoter or to the promoter's client, if  
25 any. In other embodiments, for example embodiments directed at targets not individually known, the database may include little or no contact information. In this case, the database includes primarily other information related to the promotion or project, such as the name of the project, the dates of a limited time promotion, the region affected by the project, or the causes or products that are the goal of the promotion. Such causes can be a  
30 given social cause, a given political position, or a particular set of one or more meetings.

In step 330, a pile of unique host names is generated from information in the project database, such as contact information, and the SLD names. Either all or some of the host names from the pile of host names are then assigned to the IP addresses of the set of one or more IP addresses for the one or more physical devices on which the SLD servers are located.

In step 340, the SLD name servers for the set of SLD names are updated with the host names assigned to IP addresses, and the corresponding IP addresses. Also updated are the local names filed on the domain servers that respond to requests for connection to subdomains under each SLD in the set of SLDs for the promotion.

In step 345, the local domain name server responds to requests for the IP address of one of the host names, or web sites. In this step, a user on user computer 220 is notified that a particular virtual server with one of the host names resides on a particular physical device with a particular IP address. Responding to such a request is a prelude to receiving a request from that user for a service to be performed by the virtual server with that host name.

Figure 3B depicts steps directed to preparing a web page with contact specific content for returning to a user's browser on a user computer 220 in response to a request for web service. Many of these steps are not necessary if the promoter is interested only in obtaining many visits from contacts induced by use of the contact's name or information in the domain name. However, if the service to be provided to a requesting contact is to be contact specific, then at least some steps depicted in Figure 3B are needed.

In step 350, the content of a web page is generated by a program which retrieves data from one or more databases depending on the host name included in the request for service. Since a particular host name corresponds to a particular contact in this embodiment, as can be determined from the contact database, any of the information in the contact database can be used to provide content or to determine which content to provide based on the host name. This step will be described in more detail later.

In step 360, the contact is notified about the virtual server, for example, a web site bearing contact specific information within the virtual server's domain name. In a preferred embodiment, the information included in the virtual servers domain name includes the first name and last name of the contact. The notification can be sent by email if the contact's

email is available, for example, within the contact database. Alternatively, the notification can be done by mail if the contact's mailing address is included in the contact database. In another alternative embodiment, such as when the project is directed to targets that include unknown persons, the notification can be broadcast, such as over TV or radio.

5       After the contact is notified of the virtual server bearing contact specific information, in the current embodiment, such as the contact's first and last name, the virtual server can expect a request from the contact for services at the virtual server, for example, a request for a web page. Activity is also monitored at the web site to determine if a web page was visited. Since each web site is associated with a contact, this information  
10 provides the promoter with an indication which contacts have responded to the notification of the promotional web sites, and which have not.

In step 380, different branches are taken depending on the stage of the promotion. In Case 1, a promotional duration has expired, and the promotion or project is ended and control flows to step 390. Here the host names associated with the expired promotion and  
15 contacts are removed from the name files of the local name servers using a name server update record that is conventional for local name servers. Subsequent requests for service having such host names will be returned with a message indicating that that server is no longer available. Flags in the contact database are updated in this step to indicate that contact is not to take up a host name in the pile of host names. In this way contact specific  
20 web sites can be generated that are temporary. An advantage of temporary contact specific web sites is that host name uniqueness does not have to be maintained over periods of times long compared to promotions. Thus host name uniqueness does not have to be maintained for all host names created over several years.

In Case 2, the stage of the promotion is such that characteristics of the promotion  
25 itself are not yet to be changed, but no visit has occurred even though sufficient time has passed, a new notification can be sent to the contact. This new notification reminds the contact of the existence of the web site bearing his name. This is indicated by the arrow returning control to step 360.

In Case 3, the promotion has advanced to a stage such that the characteristics of the  
30 promotion have changed, so the content of the web page may be changed. This is indicated by the arrow returning control to step 350. This path might be followed, for example, if a

particular article being promoted is found to elicit little interest by visiting contacts. Then a different article might be substituted in the web page presented to the visitor. As another example, discounts offered to the visitor might be increased or decreased to reflect remaining supplies of the articles being promoted.

5        Using the steps depicted in Figures 3A and 3B, a promoter can establish a large number of virtual servers as web sites with contact specific domain names that induces or at least encourages contact visits to the web sites. Because the web sites are generated automatically they can be produced cheaply enough that the expected return from each visit is above the cost of producing the web site. In a preferred embodiment, the contact's  
10 first name and last name are included in the domain name comprising the host name for the web site. Experience has shown that about 90% of contacts notified about the existence of web sites with the contact's name in the web site's domain name often make visits.

In other embodiments, the promotion may not be directed solely at known contacts but at targets at least some of whom are unknown. In this embodiment, the contact  
15 database includes records with only promotional information.

#### AUTOMATED GENERATION OF CONTACT SPECIFIC HOST NAMES FOR MULTIPLE VIRTUAL SERVERS

Figures 4A and 4B are flow diagrams for details of step 330 from Figure 3A for generating multiple unique domain names according to one embodiment of the present  
20 invention. This process is designated by step 330' indicating it is an optional alternative for other methods of generating unique host names from the contact database and SLD names. In this embodiment, a first name part and a second name part are retrieved from the contact database, in step 410. In step 412, each of the first name part and the second name part are converted to canonical name parts. A canonical name part follows the conventions for  
25 domain naming. For example a canonical name part does not include symbols for characters prohibited from domain names. Characters prohibited from domain names include all non-alphanumeric characters except underscore ( ) and dash (-). That is, letters A-Z, numerals 0-9 and \_ and - are allowed in canonical names, but other characters are not allowed. In step 414, first name part and the second name part are joined into a canonical  
30 whole name. In a preferred embodiment, the first and last name are separated by a dash.

At any instant in time, and at any level of domain name beyond the SLD, the local name server maintains a local name file listing the subdomains at the next level of domain naming, and associated IP addresses. The local name server is initially established by a domain server administrator, and may or may not be the same as the SLD name server.

- 5 Subsequent updates are generated and sent to the local name server automatically in this embodiment, as described in more detail below.

- Duplicate subdomain names are not allowed in that local name file. The local name file can be updated one name at a time or can be updated by adding multiple names at one time, or can be replaced entirely. However the local name file is updated, a check must be
- 10 performed that a subdomain name being added is different from any other subdomain name being added or remaining in the local name file. It is anticipated that a block of new subdomain names can first be generated and then compared to names in the local name file. It is also anticipated that each potential subdomain name can be compared to every name in the local name file and already in the block before being added to the block. The best
- 15 choice for a particular embodiment depends on performance issues.

- In the exemplary embodiment, all domain names for all SLD servers maintained by a promoter's equipment over one or more promotions can be listed in a master list database so that all checks of uniqueness can be made against the records in the master list database. Uniqueness is then verified again when the records are loaded from the database onto the
- 20 name servers. Any problems cause the offending record to be flagged as in error.

- If there are several SLD servers in the set of SLD servers associated with a promotion, then the new virtual servers can be distributed among the SLD servers. This is desirable to distribute processing loads for serving the names. The virtual servers can be distributed among the SLD servers evenly, or in any ratio determined by the authority
- 25 establishing the web sites. In the following example, we assume that a relatively even distribution of virtual servers among the set of SLD servers in the promotion is desirable. Alternatively, a relatively even distribution of virtual servers among the available IP addresses may be desirable.

- In one embodiment, the local name file for one of the SLD names is made the
- 30 current local name file in step 416. In step 418, it is determined whether the canonical whole name created from the contact database is absent from the subdomains in the current



local name file. If the canonical whole name is absent from the subdomains, then it is an appropriate name for a subdomain for the current local name file. In this case control passes to point B which will be described later. However, if the whole name is found in as a subdomain in the current local name file, then the whole name is inappropriate for this  
5 current local name file. In this case, the whole name should be compared to the subdomain names in the other local name files of the other SLD names available for the promotion. This is represented by the passage of control to set 420 where it is determined whether all the local name files associated with the set of SLD names in the promotion have been checked against this canonical whole name. If not, then the next local name file is made  
10 current and the whole name is compared to the subdomains there as represented by the arrow from step 420 to step 416.

If the last of the local name files have been checked and the canonical whole name has been found in each of them, then control passes to step 424 where the canonical whole name is modified. Then control passes back to step 416 where the modified canonical  
15 whole name is now compared to the subdomain names in each of the local name files associated with the promotion. The loop from 416 to 418 through 420 to 424 continues until the canonical whole name has been sufficiently modified to be unique in at least one of the local name files involved in the promotion. More details on how the canonical whole name can be modified in step 424 are given below.

20 Once a local name file is found which does not contain a subdomain identical to the canonical whole name, control passes to point B shown on Figure 4B and into step 426. In step 426 a host name is set by appending the canonical whole name to the left of a dot. To the right of the dot is the domain name zone to which the subdomain belongs. The IP address of the name server responsible for this zone is known or can be obtained from the  
25 DNS using a request to connect.

For example, if the local domain is sld3.com and the canonical whole name is not found among the subdomains listed in the local name file for sld3.com then the whole name is appended to the left sld3.com. That is, if the canonical whole name is john-smith, then the host name becomes "john-smith.sld3.com." In step 428, the host name just  
30 generated is added to a pile of host names generated for the promotion. This pile can then

be added as a block to the local name servers. Alternatively, the host name can be added directly to the local name server at this time.

In step 430 the IP address of the local domain server is associated with the host name. For example, the host name john-smith.sld3.com is associated with the IP address of sld3.com which is w.x.y.z1. Control then passes to step 340 in Figure 3A in which the local names files are actually updated.

Figure 4C is flow diagram for details of modifying a canonical whole name as performed in step 424 of Figure 4A. The steps of Figure 4C represent one alternative set of details for achieving a modified canonical name and so are labeled step 424'. Other methods of achieving a modified canonical name can be employed in step 424. In the embodiment of 424', several changes to the canonical whole name are considered. In the preferred embodiment, only one of the changes is applied on any pass through step 424'. Step 442 indicates that a canonical first name part can be changed to an initial for that first name part. For example, john can be replaced by the initial j. If the first name part has already been replaced with an initial in a previous pass through 424' then in step 444 a nickname is substituted for the canonical first name part. For example, if the canonical first name part is john and the initial j is not available, then john can be replaced by the nickname jack. If this also fails to be unique among all the local name files, then in step 446 a different separator is placed between the canonical first name part and the canonical second name part. This substitution includes multiple characters substituted for a single separator and using a different character for the separator. At this stage, canonical characters only are used for the separator, except the dot is not used because that indicates another level of subdomain.

If this substitution is still not sufficient, then in step 448 additional canonical characters are added to the whole name. In one embodiment, the additional characters are based on other data obtained from the contact database. For example, a zip code is be added or a street and number are added, or both. In this way, many permutations of the contact's name can be achieved to avoid duplication among subdomain names within a local name file. In another embodiment adding characters, a unique name is generated by simultaneously adding another level of subdomain. This is done by adding a dot to the right of the canonical whole name and a unique set of canonical characters to the right of

the dot. In one embodiment, these latter characters are generated at random until uniqueness is achieved at its level of domain name.

### THE CONTACT DATABASE

The contact database is one embodiment of a project database. The project  
5 database can be implemented in any of a variety of commercially available database  
systems. The information in a project database can be in one table or distributed over many  
tables according to a variety of schema that can be developed by a person of ordinary skill  
of the art of databases. It is only required that the project database contain some project or  
promotion specific information and fields for indicating a resource location on the network,  
10 such as a host name or complete URL. It is sometimes convenient to insert the IP address  
with the host name or URL in the project database.

In Figure 5A, an example contact database is associated with a promotion indicated  
by a promotion name in column 550. All contact information shown in Figure 5A are  
associated with the same example promotion here called a "Sweater, Inc. Spring 2000"  
15 promotion. Exemplary contact information stored for each contact include a contact first  
name, column 552, a contact last name, column 554, a contact company, column 556, a  
contact address, column 558, and a contact phone number, column 560. It can be easily  
appreciated that the columns in Figure 5A may refer to a single field in a database record  
or to multiple fields in a database record. For example a contact address would normally  
20 comprise a record for a number and street, a record for a city, a record for a state, a record  
for a country and a record for a country code such as the U.S. zip code. The ellipses to the  
right of column 564 indicate that other contact information fields can be usefully  
maintained in the contact database, such as contact title, contact department, contact car  
model, and contact shoe size, among others

25 At least one field is devoted to a host name associated with a contact, column 562.  
In this embodiment one other field is associated with an IP address, column 564, associated  
with the host name, but this is done more for convenience than necessity. When the  
contact database is first established the host name and IP address fields are blank. After  
step 430 of Figure 3A, the contact database has been updated with a host name and IP

address value for each contact for whom a virtual server or web site has been generated. In this example, the contact specific information included in the host name includes the contact's first name and the contact's last name, all lower case, separated by a dash. This whole name becomes the third level domain name, i.e., the subdomain name for the SLD name.

Row 570 shows the host name generated for contact John Smith of the Fancy Store in Central Park, New York. The third level domain name is john-smith. The second level domain name is sld2 and the top level domain name is com. Since john-smith is part of a virtual server name, it has one of the IP addresses of the same physical device as its domain server i.e., physical device of the sld2.com server. In this embodiment that IP address is w.x.y.z1 as shown in column 564 of row 570. Looking down column 564, one can see that all the host names have one of the two IP addresses of the physical devices used in this promotion, i.e., w.x.y.z1 and w.x.y.z4. Column 562 shows that each succeeding contact is added to the next second level domain of the set of second level domains used for the promotion, i.e. sld2, sld3, sld4 and sld5. In row 578, column 562 shows that the next contact was placed in sld2, thus starting another cycle through the four SLD domains involved in the promotion.

The procedures to ensure uniqueness in host name are reflected in the host name given to the contact in row 582. This contact, Mary Smith, would naturally have been assigned to sld4, the next local name file in the sequence of four SLD name files. However, a Mary Smith is already in sld4.com by virtue of the contact in row 574. Therefore, when the canonical whole name mary-smith was compared to the subdomains in the local name server for sld4.com, the canonical name was not absent. Thus this canonical whole name could not be added to that local name file. Consequently, the next local name file was made current, i.e., local name file for sld5.com was made current. Since the canonical whole name mary-smith was not among the subdomains listed in the sld5.com name file, mary-smith was added as a subdomain in this name file. If the canonical whole name mary-smith had been found in every local name file, then the canonical whole name would have been modified according to one of the procedures shown in Figure 4C. For example, step 442 would modify mary-smith to m-smith. If m-smith had not been previously added to at

least one of the local name files, then it would added to the first of those local name files the loop happened upon.

### UPDATING DOMAIN NAME SERVERS

When a record is added to a name server, the record includes a domain name, an IP  
5 address of the hardware device which will respond to requests for the domain name, a  
record type, a class, and a time to live parameter (TTL). The record types include an "A"  
record type and a "CNAME" record. The class includes IN for Internet.

The time to live (TTL) parameter affects the way domain name servers cache  
messages received from foreign name servers. For example, when the name server running  
10 on hardware device 230 for the user computer 220 requests the IP address of one of the  
virtual servers produced according to the present invention, the answer eventually returned  
from the name server for the virtual server is the IP address of physical device 280. To  
make a second request to the same virtual server more efficient, the foreign name server,  
such as the name server on hardware device 230 for user computer 220, stores the virtual  
15 server name and the IP address in a cache in its fast volatile RAM or slower non-volatile  
disk. The TTL parameter indicates a time limit on information provided to the cache. By  
setting a long TTL, the cache record will reside on their hardware device 230 for a long  
time before checking with the authoritative name server. By setting a short TTL, the  
domain server on device 230 will check quickly with the authoritative server. If the  
20 promotional web site expires soon after it is visited, or is intended to be visited only a few  
times, then, shortly after this information is cached, it is out of date. The short TTL will  
cause the name server on device 230 to quickly learn of the expiration of this domain name  
and remove this record from its cache.

According to one embodiment of the present invention in which the web sites are  
25 deleted shortly after being visited, the TTL for a user's domain name server, such as the  
foreign name server running on hardware device 230 for user computer 220, is set to a  
short time, for example 10 minutes. This short time to cache the record giving an IP  
address for one of the virtual servers is advantageous because that virtual server is expected  
to be used only a few times and often only once. That user will require that IP address only

a few minutes after the record is cached. However, because so many virtual servers can be produced according to the present invention, the domain name server on physical device 230 may be swamped with tens of thousands and even millions of cached records for the virtual servers. Each of these many thousands of virtual server domain names will be used only a very few minutes. The burden on the cache resources of the foreign domain server is great if all the thousands or tens of thousands are maintained in cache at the same time. By specifying a short TTL, the foreign domain name server will retain the records for the IP address of the virtual servers a very short time and thus will likely not have to cache thousands or tens of thousands of records at the same time. Thus, according to one embodiment of the present invention shown in Figure 5B, when a request to connect is processed, the return message includes a short TTL. This is accomplished by setting the TTL for all SLD names associated with the promotion on the SLD name servers to a small value, on the order of minutes. Alternatively, this can be produced by storing longer values for TTL on the SLD name servers, but configuring the SLD name server to reduce the TTL from the large number stored to a short time, on the order of minutes, when the SLD name server is processing a request to connect to one of the SLD names associated with a promotion.

In step 340, the local domain name servers are updated based on the new host names generated. These local name servers should retain the record associating a virtual servers host name with an IP address for a time on the order of the promotion life. Therefore, Figure 5C shows a particular embodiment 340' of the step 340 in Figure 3C. Step 340' includes step 540 in which the time to live parameter is set to a large value on the order of the life of the promotion when the local name server is updated.

Figure 6A and 6B show contents of a cache on a user's domain name server before and after requests for connection to a virtual server with a domain name generated according to the present invention. In Figure 6A, the computer device 230 running the user's domain name server includes a cache 630 of recent responses to request to connect. The cache includes records such as records 632 which identify a IP address with a domain. For example, record 632 shows that the cache includes the IP address of a top level domain name server. Thus requests to the name server for .com can be processed by sending requests directly to machine 241 at IP address a1.b1.c1.d1 without having to go to a route

name server first. Note that the TTL parameter in this record is set to 604,800 seconds which corresponds to about 1 week. Thus, this record 632 will expire in a week. This forces the user's domain name server to initiate a new request for connection via the route name server at least once a week. In Figure 6B, a request by the user to connect to a virtual server with a host name john-smith.sld3.com was recently resolved and an IP address of w.x.y.z1 was obtained. However, the TTL for this cache record is very short, set to 600 seconds, i.e., 10 minutes. This is shown in record 634 in the updated cache 630' in the updated user's domain name server 230'. This short TTL is beneficial in avoiding congestion on the domain server's cache 630' with thousands or ten of thousands of records associated with the bulk web sites generated according to the present invention.

### WEB PAGES FOR THE VIRTUAL SERVERS

According to the procedures already outlined, a large plurality of virtual servers can be generated with host names including contact specific information. Properties of the virtual servers associated with each host name are stored by the operating system typically as a high-level system object. These properties includes exhaustive rights and privileges for the servers as well as routing requests for particular services to the particular servers that process those requests. Web requests are sent to a web server associated with a particular virtual server. The web server description includes a location for a home page, i.e., a home directory, where the first web page is located, and a name of a file containing the first web page to return in a response to a web service request. If no web page file is specified, the web server looks for a file name of the type home.htm in the specified directory. If no directory is specified, the web server goes to a home directory for the domain server.

According to a preferred embodiment, separate directories for the plurality of virtual servers are not defined in the system level objects. In this embodiment, therefore, all requests for web service for all virtual servers of a common domain server are directed to a home directory for the common domain. With this approach, only one web page file has to be constructed for the possibly large plurality of virtual servers defined as subdomains under the common domain. For example, all virtual servers in the common domain sld3.com are directed to the same home directory, the home directory of sld3.com. This is

especially efficient if the same web page content is going to be presented to visitors of all the virtual server web sites.

This also is efficient when contact specific content is to be presented to visitors of the virtual server web sites. This is because the request, which specifies the host name of the virtual server, uniquely identifies the contact. By executing scripts that detect the host name, and access the contact or project database, contact specific processing and presentation of web pages can be achieved, without the overhead of maintaining a large number of web pages.

In this embodiment, a request from a user's web browser program to a web site includes the web site's host name and an IP address for the user's machine, along with many other variables, in a string of characters called CGI variables. The web server will then open the default web page file in the default common directory. Thus, in the preferred embodiment, the default web file in the common directory includes script statements that launch processes that can query databases, retrieve information, log activity, and generate a response or a report or both.

Figure 7A depicts the contents of the default file 730 in the default directory 281 on the particular hardware device 280. The file 730 includes script 732 to capture the host name and remote address in the CGI variables of the request. In this embodiment, the file 730 also includes script to find the host name of the request in the contact database. In script 736 it is determined whether the host name is in the contact database or not. If the host name is not in the contact database then this request is invalid and can be directed to a different web page. If the host name is in the contact database but the promotion it is associated with has expired, then again the request can be diverted to a different web page because the host name is no longer valid. In the preferred embodiment, the request is routed to the home page of a system administrator. The file 730 also contains script to log the visit by writing information to a log file.

At this point, the visitor is permitted to view the html page. The html page is then constructed from standard page elements such as images and text and sound files along with contact specific information. The contact specific information is generated by script 740 to fill a particular element with information from the contact database based on the



host name of the request. This is possible because the host name uniquely corresponds to a contact in the contact database.

In addition, file 730 in this embodiment includes script 742 to retrieve different page elements from a database of page elements based on the host name. These page elements don't contain contact specific information, but the decision to present them is based on the contact. For example, if the contact is male then page elements of interest to men will be inserted into the web page. These page elements don't include information specific to the contact, but the decision to include male versus female interesting elements is based on the contact. When script 742 and 740 have finished, the html page is ready for presentation to the visitor's browser.

The web page may be downloaded with script 74 to detect user interaction with the html page elements. Such scripts are known in the art for detecting user action on mouse and keyboard and other input devices. Finally, script 746 is included to launch a process based on the user interaction and information in the contact database. For example, if the user indicates that a product will be ordered, this script 746 can issue the order, send the ordered goods and a bill to the contact at the contact address.

Figure 7B shows an exemplary web page presented to the contact by the contact's browser as a result of a file on the common directory being opened by the user's request for web service. This is an example of a web page that would be produced when a request for web service is received based on a domain name of mary-smith.sld4.com. The host name mary-smith.sld4.com is found in the contact database depicted in Figure 5A associated with the Sweaters, Inc. Spring 2000 promotion in line 574. Because of this, it is known that the contact is Mary Smith of Fancy Store at Rodeo Drive, California with phone number 999-555-1010. In Figure 7B, the contact specific information obtained from the contact database of Figure 5A are shown inside dashed boxes. Mary Smith's name appears in box 752 and her company appears in box 754. Mary Smith's first name is used in box 756 to personalize a message. The message indicates pre-shipment of orders to Mary Smith's address in box 757 for orders totaling a certain number of gross specified in box 758.

Box 758 is an example of a decision to include information based on information in the contact database but does not present information from the contact database. In this case, knowing the costs of delivery to Mary's address the script determines how many

gross of sweaters must be ordered to subsume the costs of shipping. To ship to Rodeo Drive, California, the script determines that at least 6 gross of sweaters must be ordered. Therefore the number presented in box 758 is contact specific information that did not come from the contact database. As another example of information that is contact  
5 specific, but not found in the contact database, is the choice of sweaters displayed in boxes 760 and 762. Because the contact database may indicate Mary is female, the top selling sweater among women is presented first in box 760 while the top selling sweater among men is presented second in box 762.

Other examples of page elements that do not contain information from the contact  
10 database but are contact specific include presenting different information to a corporate officer than a corporate engineer, presenting different information to a marketing vice-president than to a vice-president of technology or a corporate legal counsel, presenting different information to a franchiser than a franchisee, presenting different information depending upon industry of the contact, and any other choice of web page elements based  
15 on information in the contact database.

Boxes 763, 764 and 766 are examples of web page elements where the visiting user's actions are recorded and responded to.

### PERSISTENT CONTACT SPECIFIC VIRTUAL SERVERS

The above examples generate transient, contact specific virtual servers for web sites  
20 and other services on the Internet that expire when a promotion ends. When the promotion ends, the virtual server names are removed from the name server and cease to respond to requests to connect. There are circumstances in which the promoter may wish the contact specific virtual servers and web site to persist for long or indefinite periods of time. A contact can then use the site repeatedly because web pages and objects on a persistent  
25 virtual server will persist across several visits. The virtual web site becomes a virtual private portal for use by clients of the contact, at the discretion of the contact. Additional functions beneficial to both promoter and contact can be provided.

For example, a document can be generated by either promoter or client, and both can collaborate on its evolution. A promoter can provide newsletter type information to a

contact that is tailored to that contact. A web object could be generated that received video images from the promoter and a second web object can receive video images from the contact, essentially providing a contact specific video conferencing function. Information related to past accounts can be presented.

- 5           At least some of the information that will persist between visits may be sensitive and would require additional security measures for accessing the web site. For persistent web sites, therefore, scripts should be included in the default file that authenticate the requestor at web service. The host name identifies the requestor sufficiently well for receiving requestor tailored content. But the host name is no guarantee that the individual
- 10           requesting access is the same as the individual who requires protection for the persistent information. Several methods are known in the art for authenticating an individual requesting access to a web site. These procedures include certificates of authenticity, passwords, fingerprints, smart cards with personal identification numbers (PINs) and encryption.
- 15           Figure 8 is a flow diagram for processing and monitoring requests for a service to a virtual server for another embodiment of step 370 from Figure 3B. This embodiment supports both transient contact specific web sites and persistent contact specific web sites. In step 810, the host name in the request is compared to a contact database to determine that a promotion has not expired. In the case of a persistent web site, simply finding a host
- 20           name in the contact database may be sufficient to satisfy this check because the persistent web site may not be subject to expiration. In step 812, authentication of the identify of the requestor is checked. Because of this authentication, the persistent contact specific web site becomes a virtual private web site. This check for authentication is not required for transient promotional contact specific web sites where sensitive information about the
- 25           contact is not presented. In step 814, the web page content is dynamically filled based on the host name authentication and the stage of promotion using scripts like those depicted in Figure 7A. In step 810, user input is accepted based on privileges for the host name and authenticated user. This includes a contact's indication of ordering a promoter's product, input on a collaborative document, and video or audio streams or both from the contact to
- 30           the web site.

In step 818, a credit card purchase process is launched based on user input indicating the contact wishes to place an order for a product offered by the promoter, or donation to a charity. The credit card purchase process will send a purchase amount, credit card number, and credit card expiration date to a fulfillment house to complete the transaction. Because the contact is known from the host name, and because the information can be protected with authentication procedures, the contact's credit card number and expiration date may already be known to the promoter. This saves the contact from having to key in the credit card number and expiration date for every purchase, saving a tedious and error prone procedure.

10 In step 820, the contact's visit to the web site is logged and activities recorded such as the number and items purchased. Information recorded by the log can help a promoter in deciding whether the cost of maintaining the contact specific web site is offset by the revenues forthcoming per web site generated.

Processing credit card purchases is hindered when the web site initiating the purchase is on a virtual server. Credit card information is processed over the Internet using a secure socket layer (SSL) or other protocols. To transfer credit card information over the Internet, the SSL invokes a certificate from a certification authority. However, certification authorities require a dedicated IP address which is not available for the home directories of the virtual servers. Thus, if the credit card information is not already in a database of the virtual server, the virtual server cannot receive that information from the contact. In this case, the virtual server will route the request for purchase to an SSL server which will accept the credit card information from the contact and place the transaction data onto a separate computer with a stand along IP address. This process is illustrated in a block diagram of Figure 9 where the home directory on the virtual server 905 resides on physical device 280, and a request is routed from the home directory 905 to the SSL server 910, and then to the separate computer 920 with a dedicated IP address. The credit card transaction is completed in a fulfillment house 940 which, in general, is remote from the separate computer 920. The final leg required to report this transaction at the fulfillment house is accomplished as follows. The fulfillment house backend system 944, which does the final credit card transaction processing, is connected to a separate computer 942 within the fulfillment house 940. The separate computer 942 periodically calls the separate computer

920 over the virtual private network link (VPN) 930. The VPN link can be a PC-to-PC link such as PPTP. Once connected, the separate computer 942 tells the computer 920 to determine if any credit card transactions are recorded there. If so, those transactions are downloaded over the VPN link 930. From the separate computer 942 the information is  
5 passed to the fulfillment house backend system 944 where the transaction is completed.

### CONTENT SPECIFIC URLS

The procedures outlined above describe how domain names can be generated that use project/contact specific information in domain names of virtual servers. When a contact requests a web service from a web server, the contact can specify a particular  
10 resource or file accessible to the web server. As described in the background section, the URL specifies the service requested, the domain name of the server providing the service, and a resource location at the server. Thus, a URL address can be created which includes the project or contact specific information in any portion of the URL address.

Therefore, a contact/project specific URL is produced when a contact/project  
15 specific domain name is generated for the host, as described earlier. In addition, a contact/project specific URL can be produced without putting the project information in the domain name, simply by putting the contact/project specific information in the resource identification portion of the URL. This can be done by generating a directory or subdirectory with the project specific information in the directory name. This approach  
20 does not require the formation of additional local name servers or updates to other name servers on the Internet. This process would then require steps analogous to step 320, 330, 350, 360, 370 and 390, and do without steps analogous to steps 310, 340 and 345.

Figure 10 depicts steps in a method to generate and monitor contacts specific URL addresses for a promotion. In step 1020, similar to step 320, a contact database is  
25 established for a promotion. Step 1020 may differ from step 320 in that the database will have a field for the contact specific URL in lieu of, or in addition to, the fields for a contact specific host name and the associated IP address. In step 1030, a unique directory name is constructed from the contact database for use in a contact specific URL. In step 1050 a web page falling under the contact specific directory name is produced and programmed if

necessary to provide promotion content and contact specific promotion content. In step 1060, the contact is notified about the existence of the resource having a URL that includes contact specific information. In step 1070, if the contact requests the resource with the contact specific URL, the activity at the contact specific URL is monitored. For example, 5 scripts can be included in the resource of the URL to write to a log file when the web page specified by the URL is opened. Step 1080 is similar to step 380 in that, depending on the stage of the promotion, the user is again contacted to notify him of the contact specific URL, for example if the resource at the contact specific URL had not yet been opened, or that promotion content of the web page can be updated in step 1050, if the parameters of 10 the promotion have changed. As in step 380, in step 1080, when the promotion is over, control passes to step 1090, where the promotion is ended and the contact specific directory names are deleted from the web site. As with the contact specific host names, the contact specific URL can be made persistent.

#### CONCLUSION

15 In the foregoing specification, the invention has been described with reference to specific embodiments thereof. It will, however, be evident that various modifications and changes may be made thereto without departing from the broader spirit and scope of the invention as recited in the appended claims and their equivalents. The specification and drawings are, accordingly, to be regarded in an illustrative rather than a restrictive sense.

20

---

## CLAIMS

What is claimed is:

- 1 1. A method for inducing a contact to invoke a resource prepared by a promoter on a  
2 network, the method comprising:  
3 generating a resource location description for the resource by the promoter, the  
4 resource location description including a name of the contact;  
5 providing access to the resource at a location on the network according to the  
6 resource location description; and  
7 notifying the contact about the resource location description for the resource.
- 1 2. The method of claim 1, further comprising tailoring content in the resource in  
2 response to the resource location description used to access the resource.
- 1 3. The method of claim 1, said providing access to the resource at the location  
2 comprising placing the resource at the location.
- 1 4. The method of claim 1, said providing access to the resource at the location  
2 comprising configuring an operating system to divert a request for the resource at the  
3 location to a second location where the resource resides.
- 1 5. The method of claim 1, wherein:  
2 a request for the resource includes the resource location description; and  
3 the method further comprises generating content for the document dynamically in  
4 response to the resource location description in the request.
- 1 6. The method of claim 1, further comprising:  
2 logging activity involving the resource; and  
3 changing content in the resource in response to the activity logged.

1 7. The method of claim 1, further comprising:  
2 setting up a contact database; and  
3 automatically retrieving the contact name from the contact database before said  
4 generating the resource location description.

1 8. The method of claim 7, further comprising repeating said steps of generating the  
2 resource location description, providing access, and notifying the contact for a plurality of  
3 contacts from the contact database.

1 9. The method of claim 1, wherein the resource location description is a universal  
2 resource locator address.

1 10. The method of claim 1, wherein:  
2 the resource location description includes a directory name; and  
3 said generating comprises using the contact name in the directory name.

1 11. The method of claim 1, wherein:  
2 the resource location description includes a host name; and  
3 said generating comprises using the contact name in the host name.

1 12. The method of claim 8, said generating further comprising making the resource  
2 location description unique among a plurality of other resource location descriptions  
3 corresponding to the plurality of contacts.

1 13. The method of claim 12, said generating further comprising, if an original first  
2 name of the name of the contact does not make the resource location description unique,  
3 changing the original first name to one of an initial and a nickname.



1 14. The method of claim 12, said generating further comprising, if an original first  
2 name of the name of the contact does not make the resource location description unique,  
3 changing a connecting character between the first name and a second name of the name of  
4 the contact to at least one of a different connecting character and a different number of the  
5 connecting character.

1 15. The method of claim 12, said generating further comprising, if an original name of  
2 the contact does not make the resource location description unique, adding additional  
3 characters based on other information from the contact database associated with the  
4 contact.

1 16. The method of claim 7, said generating further comprising, if an original name of  
2 the contact includes a character prohibited for a resource location description, changing the  
3 prohibited character to an allowed character.

1 17. The method of claim 11, further comprising updating a domain name file to include  
2 the host name for use by a domain name server.

1 18. The method of claim 1, further comprising terminating access to the resource at the  
2 location when a promotion associated with the resource ends.

1 19. The method of claim 1, further comprising changing content in the resource when a  
2 promotion associated with the resource reaches a predetermined stage.

1 20. The method of claim 6, further comprising repeating said notifying the contact  
2 when a promotion associated with the resource reaches a predetermined stage and the  
3 activity logged is less than a predetermined threshold of activity.

1 21. The method of claim 20, wherein the predetermined threshold of activity is one  
2 request for the resource.

1 22. The method of claim 20, wherein the predetermined threshold of activity is one  
2 payment in response to an offer presented by invoking the resource.

1 23. The method of claim 8, said generating further comprising making a subdomain  
2 name in the resource location description unique among a plurality of other document  
3 location descriptions corresponding to the plurality of contacts and sharing a common  
4 higher level domain name.

1 24. The method of claim 8, said generating further comprising, if a subdomain name in  
2 the resource location description is not unique within one higher level domain name, then  
3 using the subdomain name with a different higher level domain name.

1 25. The method of claim 2, said tailoring further comprising including information  
2 associated with the contact in a contact database into the content of the resource.

1 26. The method of claim 2, said tailoring further comprising selecting alternative  
2 resource content elements into the content of the resource based on information associated  
3 with the contact in a contact database.

1 27. The method of claim 1, further comprising denying access to the resource if a  
2 request for the resource does not include a predetermined authentication.

1 28. The method of claim 1, further comprising dynamically tailoring content in the  
2 resource in response to authentication in a request for the resource.

1 29. The method of claim 6, further comprising launching a credit card purchase process  
2 in response to the activity logged.

1 30. The method of claim 29, said launching a credit card purchase process further  
2 comprising:  
3 directing a user acting on the document to a secure socket layer server;  
4 obtaining credit card information from the user by the secure socket layer server;  
5 and  
6 sending the credit card information to a fulfillment house from the secure socket  
7 layer over a virtual private network link.

1 31. A method for inducing a contact to visit a web site prepared by a promoter, the  
2 method comprising:  
3 generating a host name for the web site by the promoter, the host name including a  
4 name of the contact;  
5 notifying the contact of the host name for the web site; and  
6 configuring a web server at the web site to process a request including the host  
7 name.

1 32. The method of claim 31, the step of configuring further comprising treating requests  
2 as visits to a persistent web site belonging to the contact.

1 33. The method of claim 32, wherein:  
2 the method further comprises receiving content for the persistent web site from the  
3 contact; and  
4 the step of configuring further comprises presenting content from the contact in  
5 response to the request.

1 34. A method for automatically generating a plurality of virtual servers on a set of one  
2 or more physical devices on a network, each device having a network address, the method  
3 comprising:  
4       setting up a database of information for a promotion;  
5       automatically generating a plurality of host names for at least one physical device of  
6 the set of one or more physical devices, a particular host name of the plurality of host  
7 names including information from the database and a domain name for a particular one of  
8 the at least one physical device; and  
9       automatically configuring a name server to provide a particular network address of  
10 the particular physical device in response to requests to connect to the particular host name.

1 35. The method of claim 34, further comprising automatically configuring a server for  
2 the particular physical device to respond to a request to the particular host name for service.

1 36. The method of claim 34, wherein:  
2       the database of information includes contact information for a plurality of contacts;  
3       and  
4       the particular host name includes a name of a corresponding contact of the plurality  
5 of contacts

1 37. The method of claim 36, said generating further comprising, if a subdomain name  
2 in the host name is not unique within the domain name, then using the subdomain name  
3 with a different domain name of the at least one physical device.

1 38. A method for automatically generating content for a plurality of resources having a  
2 plurality of corresponding resource location descriptions on a single physical device having  
3 a network address, the method comprising configuring a server for the physical device to  
4 resolve all requests for service to the plurality of corresponding resource location  
5 descriptions by opening a certain file on a certain directory of the physical device.

1 39. The method of claim 38, further comprising including scripts in the certain file to  
2 perform functions in response to a particular resource location description in a particular  
3 request for service.

1 40. A method for automatically generating web content for a plurality of virtual web  
2 servers having a plurality of corresponding host names on a single physical device having a  
3 network address, the method comprising configuring a web server for the physical device  
4 to resolve all requests for service to the plurality of virtual web servers by opening a certain  
5 file on a certain directory of the physical device.

1 41. The method of claim 38 further comprising including scripts in the certain file to  
2 perform functions in response to a particular host name included in a particular request for  
3 service.

1 42. A method of promoting a cause to a contact, the method comprising:  
2 including a name of the contact in a network address associated with the cause; and  
3 including the network address in material sent to the contact.

1 43. A method of conducting a promotion, the method comprising:  
2 including a name of the promotion in a network address associated with the  
3 promotion; and  
4 broadcasting the network address to a plurality of targets.

1 44. A method for automatically generating a plurality of virtual servers on a set of one  
2 or more physical devices on a network, each device having a network address, the method  
3 comprising:  
4 automatically generating a plurality of host names for at least one physical device of  
5 the set of one or more physical devices; and

6 automatically configuring a name server to provide, in response to requests to  
7 connect to a particular host name of the plurality of host names,  
8 a particular network address of a corresponding particular physical device of  
9 the at least one physical device, and  
10 a time to live which is less than a time to live stored by the name server.

1 45. A computer-readable medium bearing promotion information for use by one or  
2 more processors that are participating in providing resources on a network, the promotion  
3 information comprising:  
4 contact information about a contact to receive materials as part of a promotion; and  
5 a resource location description indicating where the resource can be accessed on the  
6 network, the resource location information including information from the contact  
7 information.

1 46. A computer program product for inducing a contact to invoke a resource prepared  
2 by a promoter on a network, the computer program product comprising:  
3 a computer readable medium;  
4 instructions residing on the computer readable medium for causing one or more  
5 processors to  
6 generate a resource location description for the resource, the resource  
7 location description including a name of the contact;  
8 provide access to the resource at a location on the network according to the  
9 resource location description; and  
10 prepare a message notifying the contact about the resource location  
11 description for the resource.

1 47. The computer program product of claim 46, the instructions further configuring the  
2 one or more processors to automatically retrieve the contact name from a contact database  
3 including information about a plurality of contacts before the one or more processors  
4 generate the resource location description

1 48. The computer program product of claim 47, the instructions further configuring the  
2 one or more processors to repeatedly generate the resource location description, provide  
3 access, and prepare message for a plurality of contacts from the contact database.

1 49. The computer program product of claim 48, the instructions to generate the resource  
2 location description further comprising instructions to use a subdomain name in the  
3 resource location description with a different higher level domain name, if the subdomain  
4 name is not unique within one higher level domain name.

1 50. The computer program product of claim 46, the instructions further configuring the  
2 one or more processors to terminate access to the resource at the location when a promotion  
3 associated with the resource ends.

1 51. A computer program product for inducing a contact to visit a web site prepared by a  
2 promoter, the computer program product comprising:  
3 a computer readable medium; and  
4 instructions residing on the computer readable medium for causing one or more  
5 processors to  
6 generate a host name for the web site, the host name including a name of the  
7 contact,  
8 prepare a message notifying the contact of the host name for the web site,  
9 and  
10 configure a web server at the web site to process a request including the host  
11 name.

1 52. The computer program product of claim 51, the instructions to configure further  
2 comprising instructions to treat requests as visits to a persistent web site belonging to the  
3 contact.

1 53. The computer program product of claim 52, wherein:  
2 the instructions further comprises instructions causing the one or more processors to  
3 receive content for the persistent web site from the contact; and  
4 the instructions to configure the web site further comprise instructions to present  
5 content from the contact in response to the request.

1 54. A computer program product for automatically generating a plurality of virtual  
2 servers on a set of one or more physical devices on a network, each device having a  
3 network address, the computer program product comprising:  
4 a computer readable medium; and  
5 instructions residing on the computer readable medium for causing one or more  
6 processors to  
7 automatically generate a plurality of host names for at least one physical  
8 device of the set of one or more physical devices, a particular host name of the  
9 plurality of host names including information from a database of project  
10 information and a domain name for a particular one of the at least one physical  
11 device; and  
12 automatically configure a name server to provide a particular network  
13 address of the particular physical device in response to requests to connect to the  
14 particular host name.

1 55. The computer program product of claim 54, further comprising instructions to  
2 automatically configure a server for the particular physical device to respond to a request to  
3 the particular host name for service.

1 56. The computer program product of claim 54, wherein:  
2 the database of project information includes contact information for a plurality of  
3 contacts; and



4 the particular host name includes a name of a corresponding contact of the plurality  
5 of contacts

1 57. The computer program product of claim 56, the instructions to generate the  
2 plurality of host names further comprising instructions to use a subdomain name in the host  
3 name with a different domain name of the at least one physical device, if the subdomain  
4 name is not unique within the domain name.

1 58. A computer program product for automatically generating content for a plurality of  
2 resources having a plurality of corresponding resource location descriptions on a single  
3 physical device having a network address, the computer program product comprising:  
4 a computer readable medium; and  
5 instructions residing on the computer readable medium for causing one or more  
6 processors to configure a server for the physical device to resolve all requests for service to  
7 the plurality of corresponding resource location descriptions by opening a certain file on a  
8 certain directory of the physical device.

1 59. The computer program product of claim 58, further comprising scripts in the certain  
2 file to perform functions in response to a particular resource location description in a  
3 particular request for service.

1 60. A computer program product for automatically generating web content for a  
2 plurality of virtual web servers having a plurality of corresponding host names on a single  
3 physical device having a network address, the computer program product comprising:  
4 a computer readable medium; and  
5 instructions residing on the computer readable medium for causing one or more  
6 processors to configure a web server for the physical device to resolve all requests for  
7 service to the plurality of virtual web servers by opening a certain file on a certain directory  
8 of the physical device.

1 61. The computer program product of claim 38 further comprising scripts in the certain  
2 file to perform functions in response to a particular host name included in a particular  
3 request for service.

1 62. A computer program product of promoting a cause to a contact, the computer  
2 program product comprising:  
3 a computer readable medium; and  
4 instructions residing on the computer readable medium for causing one or more  
5 processors to  
6 include a name of the contact in a network address associated with the  
7 cause; and  
8 include the network address in a message prepared for the contact.

1 63. A computer program product of conducting a promotion, the computer program  
2 product comprising:  
3 a computer readable medium; and  
4 instructions residing on the computer readable medium for causing one or more  
5 processors to  
6 include a name of the promotion in a network address associated with the  
7 promotion; and  
8 prepare a message including the network address for broadcast to a plurality  
9 of targets.

1 64. A computer program product for automatically generating a plurality of virtual  
2 servers on a set of one or more physical devices on a network, each device having a  
3 network address, the computer program product comprising:  
4 a computer readable medium; and  
5 instructions residing on the computer readable medium for causing one or more  
6 processors to

7 generate a plurality of host names for at least one physical device of the set  
8 of one or more physical devices;  
9 store a particular host name of the plurality of host names with a particular  
10 network address of a corresponding particular physical device of the at least one  
11 physical device and with a time to live; and  
12 respond to requests to connect to the particular host name, with the  
13 particular network address and with a time to live which is less than the time to live  
14 stored.

1 65. A computer selectably connected to a network at a network address, the computer  
2 comprising:  
3 a port for selectable connection to the network;  
4 a computer readable medium having project specific information; and  
5 one or more processors connected to the port and the computer readable medium,  
6 the one or more processors configured to generate a virtual server to provide a resource, to  
7 generate a domain name for the virtual server, to send the domain name and the network  
8 address to a name server on the network; and to prepare a message notifying a target of a  
9 resource location description for requesting the resource,  
10 wherein the resource location description includes the project specific information.

1 66. The computer of claim 65 wherein the project specific information includes at least one  
2 of a name of the target and a name of a promotion that expires.

1 67. The computer of claim 65, wherein the domain name includes the project specific  
2 information.

1 68. The computer of claim 65, wherein the one or more processors are further configured to  
2 provide a plurality of resources having a corresponding plurality of resource location  
3 descriptions, and to direct requests for the plurality of resources to one certain file on one  
4 certain directory.

- 1 69. The computer of claim 68, wherein the one certain file includes script to cause the one  
2 or more processors to dynamically generate a response for the request, the response  
3 depending on the resource location description.
- 1 70. A name server connected to a network at a network address, the name server  
2 comprising:  
3 a port connected to the network;  
4 a computer readable medium having a name file; and  
5 one or more processors connected to the port and to the computer readable medium,  
6 the one or more processors configured  
7 to receive a request to connect to a virtual server having a domain name,  
8 to retrieve from the computer readable medium a network address and a time to live  
9 associated with the domain name in the name file; and  
10 to send a response based on the request, the response including the network address  
11 and a time to live shorter than the time to live retrieved from the computer readable  
12 medium.
- 1 71. A system for generating promotion specific virtual servers comprising:  
2 a network;  
3 a name server connected to the network at a first network address; and  
4 a computer connected to the network at a second network address, the computer  
5 comprising  
6 a computer readable medium having project specific information; and  
7 one or more processors connected to the port and the computer readable medium,  
8 the one or more processors configured to generate a virtual server to provide a resource,  
9 generate a domain name for the virtual server, send the domain name and the network  
10 address to the name server; and prepare a message notifying a target of a resource location  
11 description for requesting the resource,  
12 wherein the resource location description includes the project specific information.

1 72. The system of claim 71 wherein the project specific information includes at least one of  
2 a name of the target and a name of a promotion that expires.

1 73. The system of claim 71, wherein the domain name includes the project specific  
2 information.

1 74. The system of claim 71, wherein the one or more processors are further configured to  
2 provide a plurality of resources having a corresponding plurality of resource location  
3 descriptions, and to direct requests for the plurality of resources to one certain file on one  
4 certain directory.


1 75. The system of claim 74, wherein the one certain file includes script to cause the one or  
2 more processors to dynamically generate a response for each of the requests, the response  
3 depending on a corresponding resource location description of the plurality of resource  
4 location descriptions.

1 76. The system of claim 74, the name server comprising:  
2 a name server port connected to the network;  
3 a name server computer readable medium having a name file associating a domain  
4 name of each virtual server of the plurality of virtual servers with the second network  
5 address and a stored time to live; and  
6 one or more name server processors configured to respond to all requests to connect  
7 to the plurality of virtual servers with a connect message including the second network  
8 address and a time to live in a cache of a requesting name server.

1 77. The system of claim 76, wherein the time to live in a cache of a requesting name  
2 server included in the connect message is less than the stored time to live associated with  
3 the domain name in the name file.

1 78. The system of claim 74, further comprising a root name server at a root network  
2 address, the root name server comprising:  
3 a root name server port connected to the network;

4           a root name server computer readable medium having a name file associating a  
5 second level domain name of each domain name of each virtual server of the plurality of  
6 virtual servers with the first network address; and  
7           one or more root name server processors configured to respond to all requests to  
8 connect to the plurality of virtual servers with a response including the first network  
9 address.

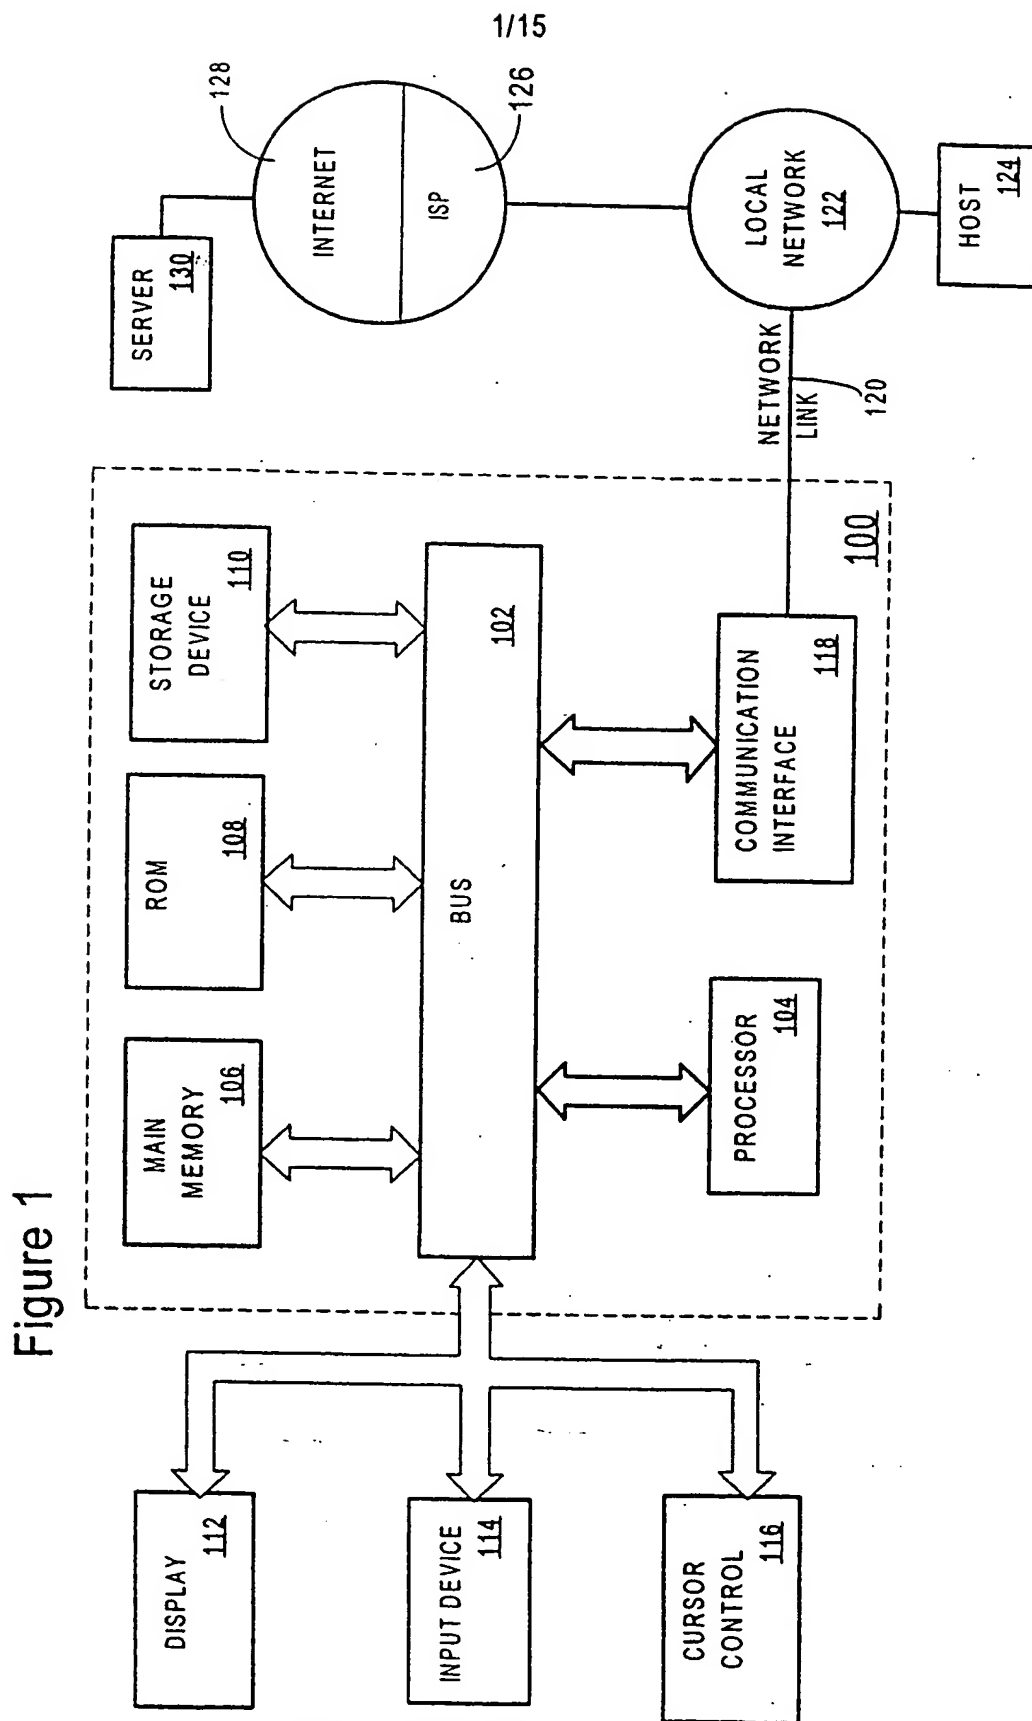

SUBSTITUTE SHEET (RULE 26)

2/15

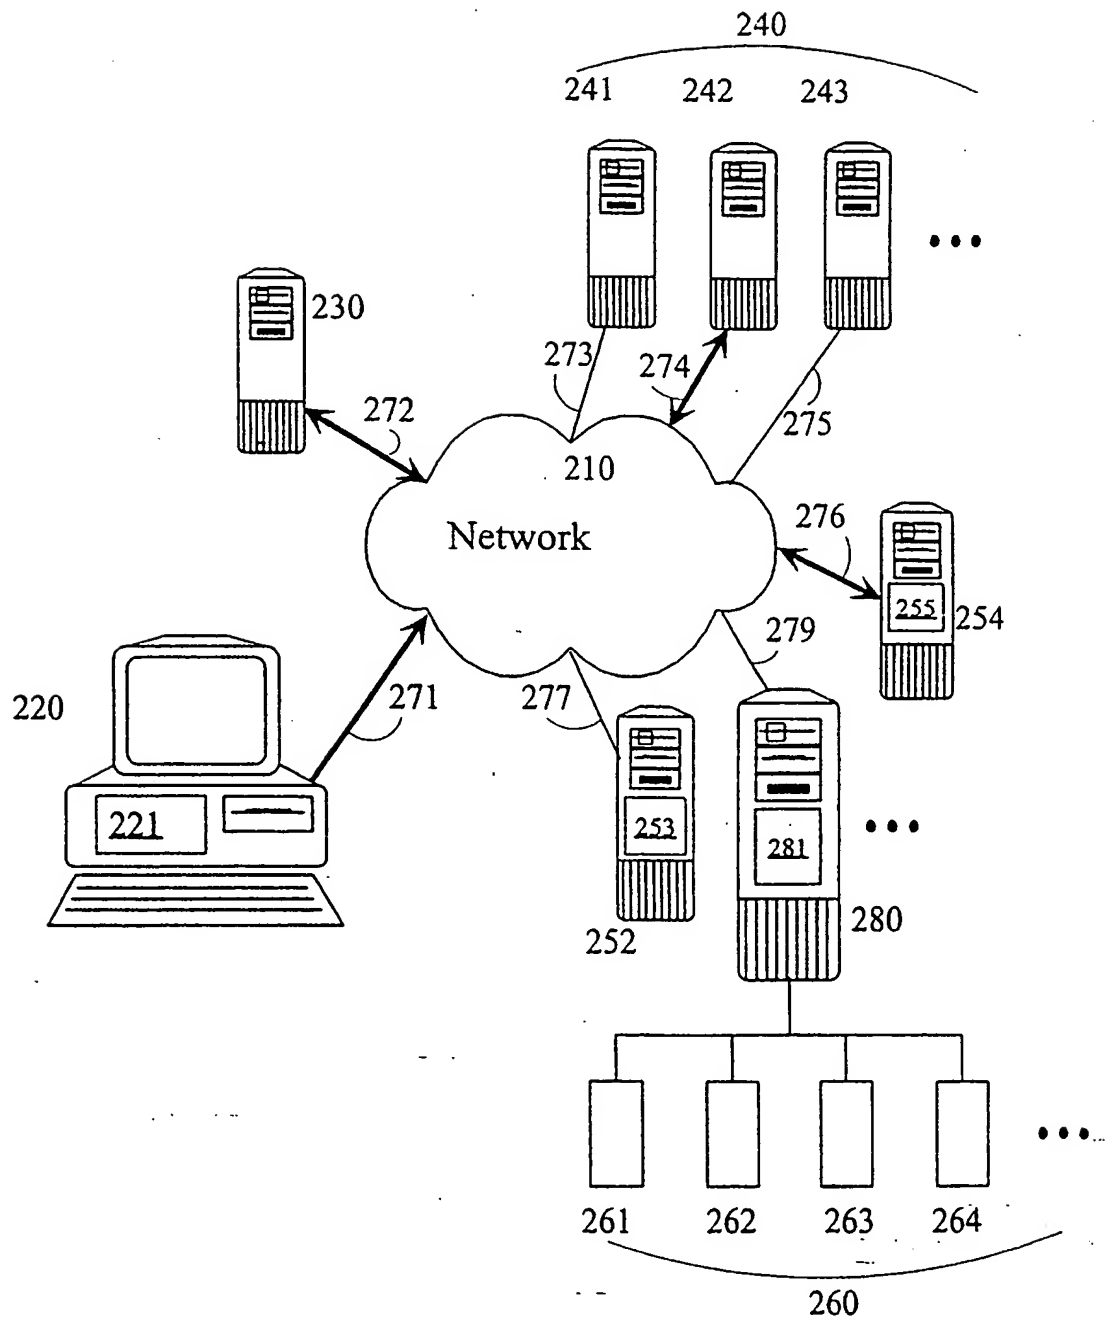


Figure 2

SUBSTITUTE SHEET (RULE 26)



3/15

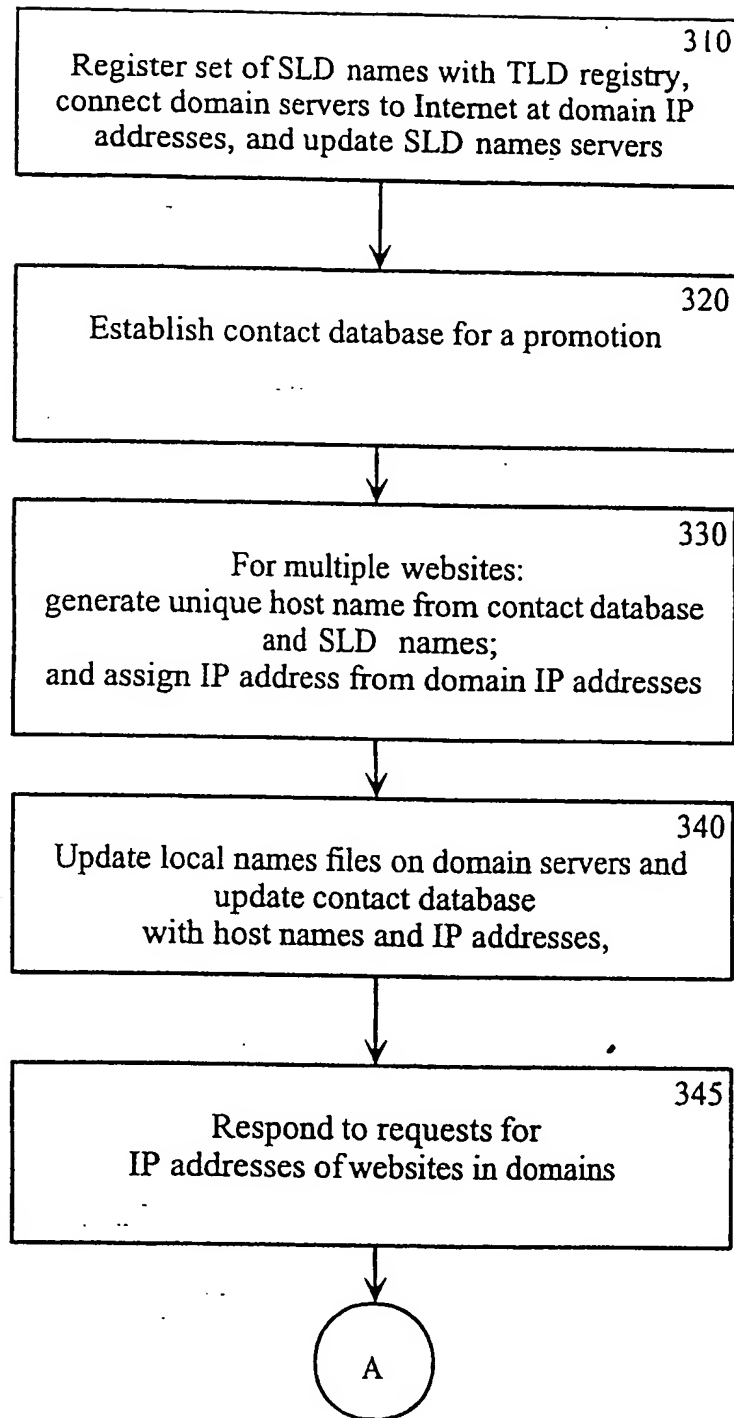


Figure 3A

SUBSTITUTE SHEET (RULE 26)

4/15

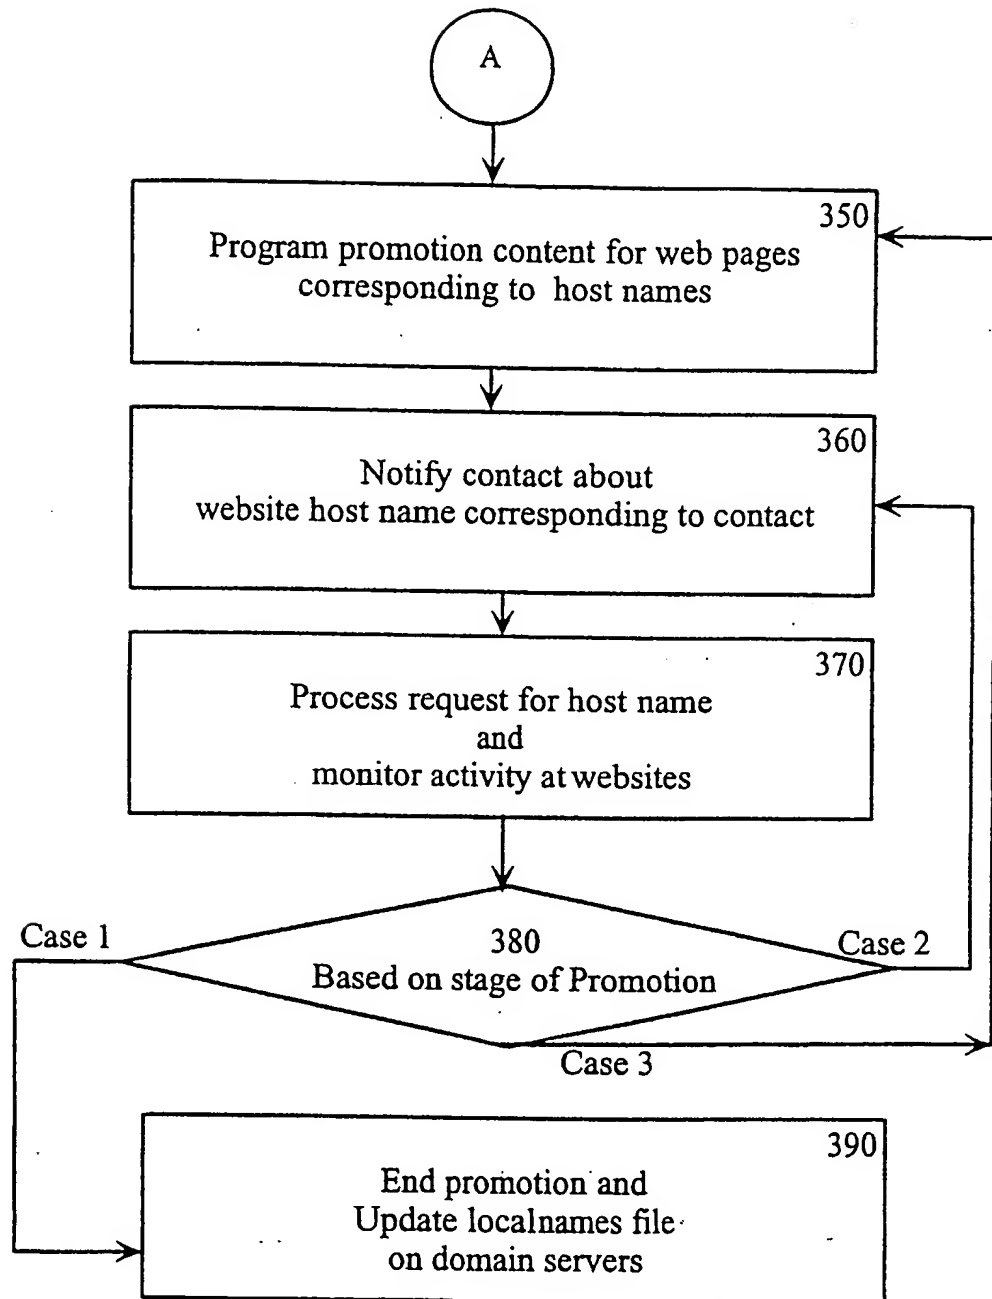


Figure 3B

SUBSTITUTE SHEET (RULE 26)

5/15

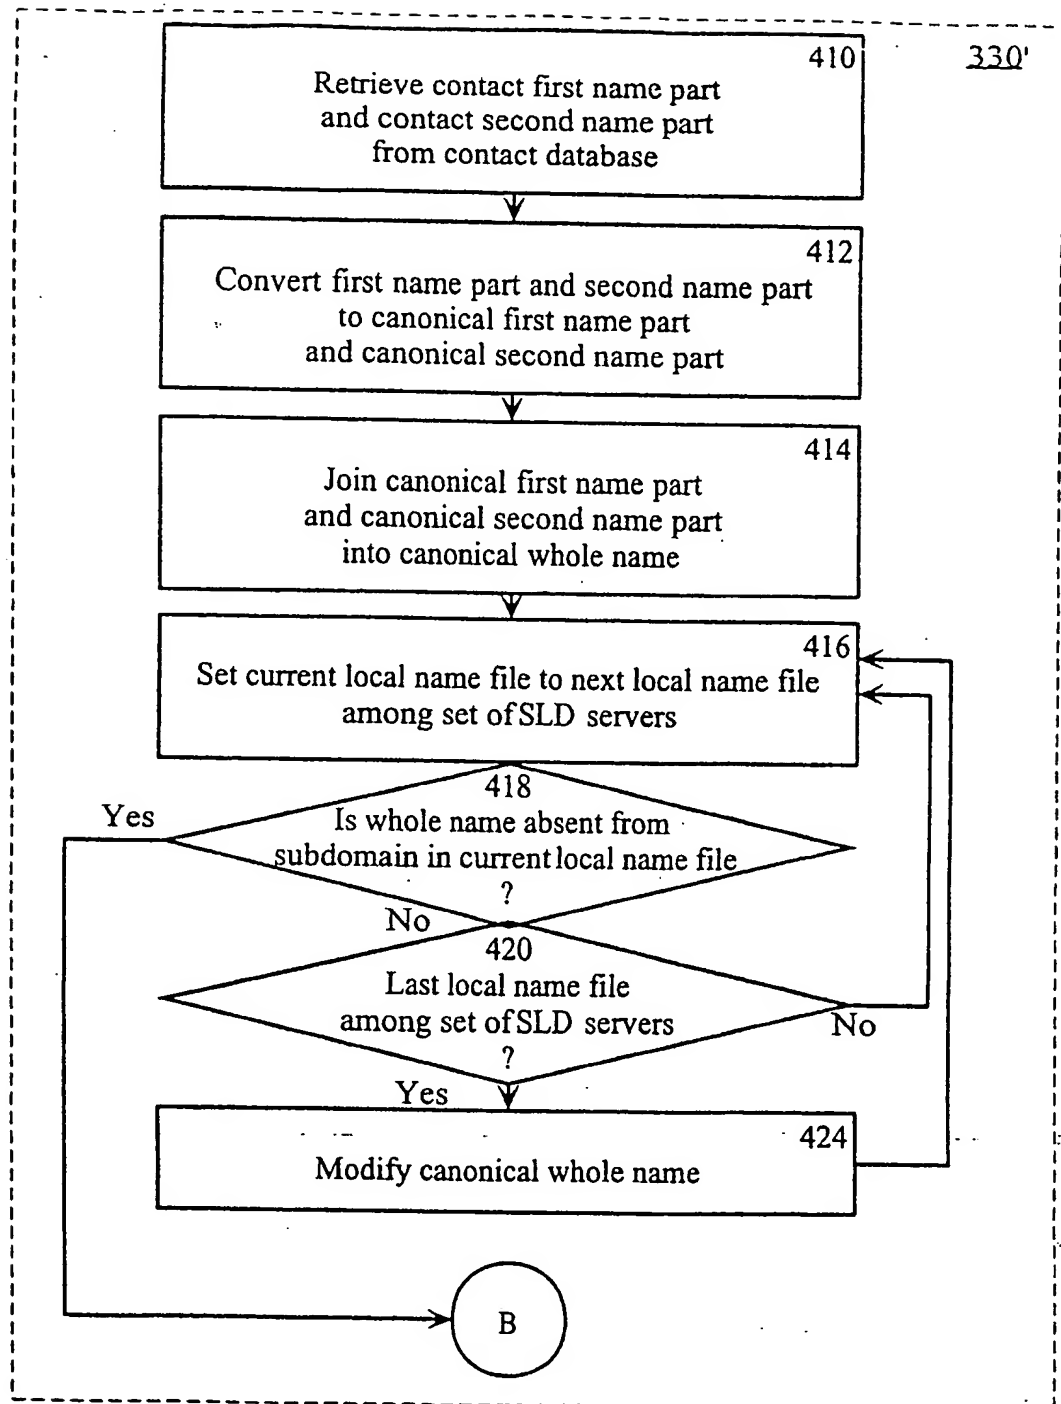


Figure 4A

SUBSTITUTE SHEET (RULE 26)

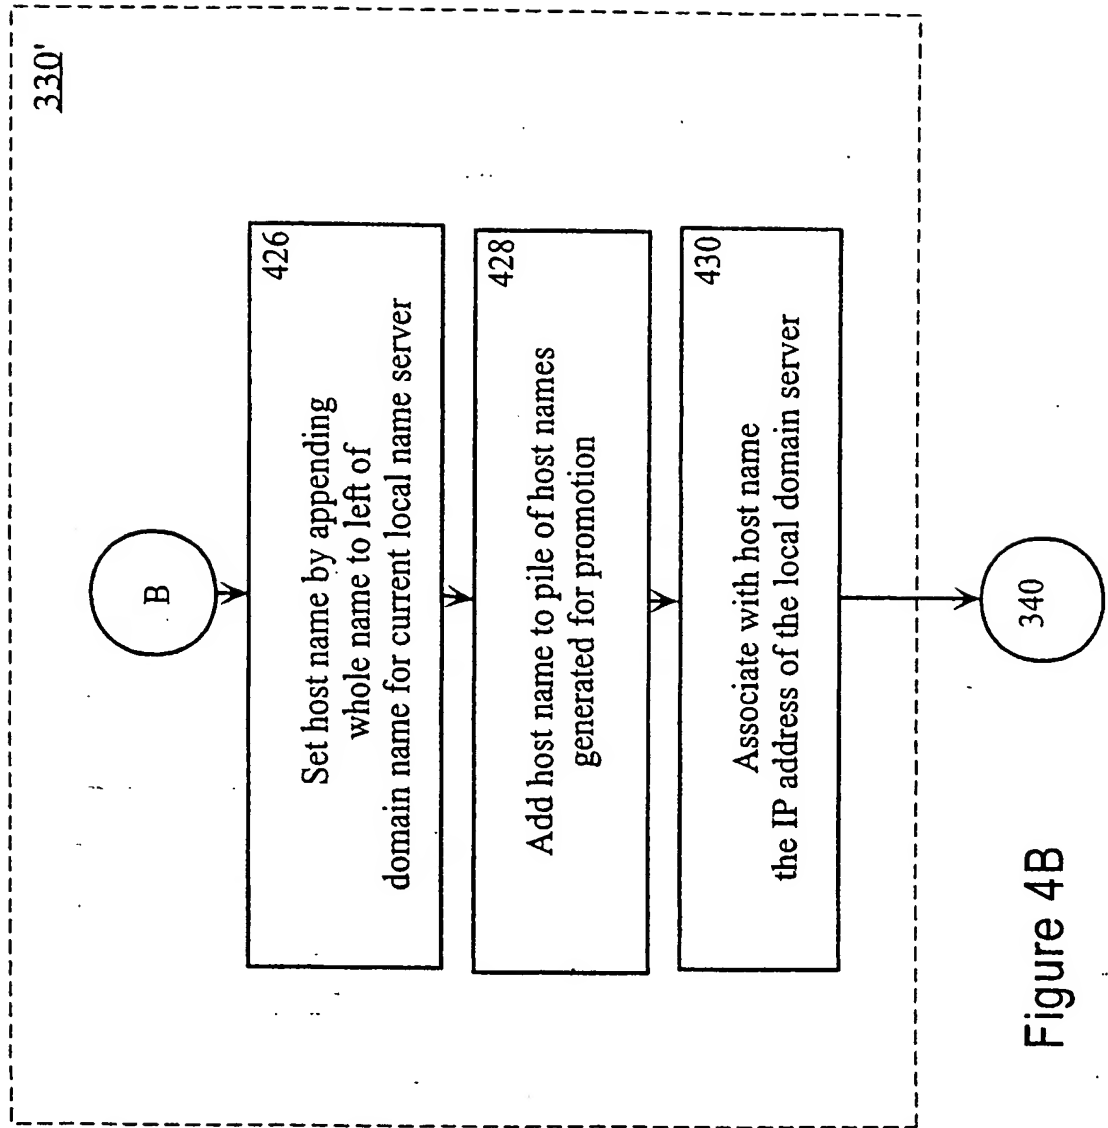


Figure 4B

7/15

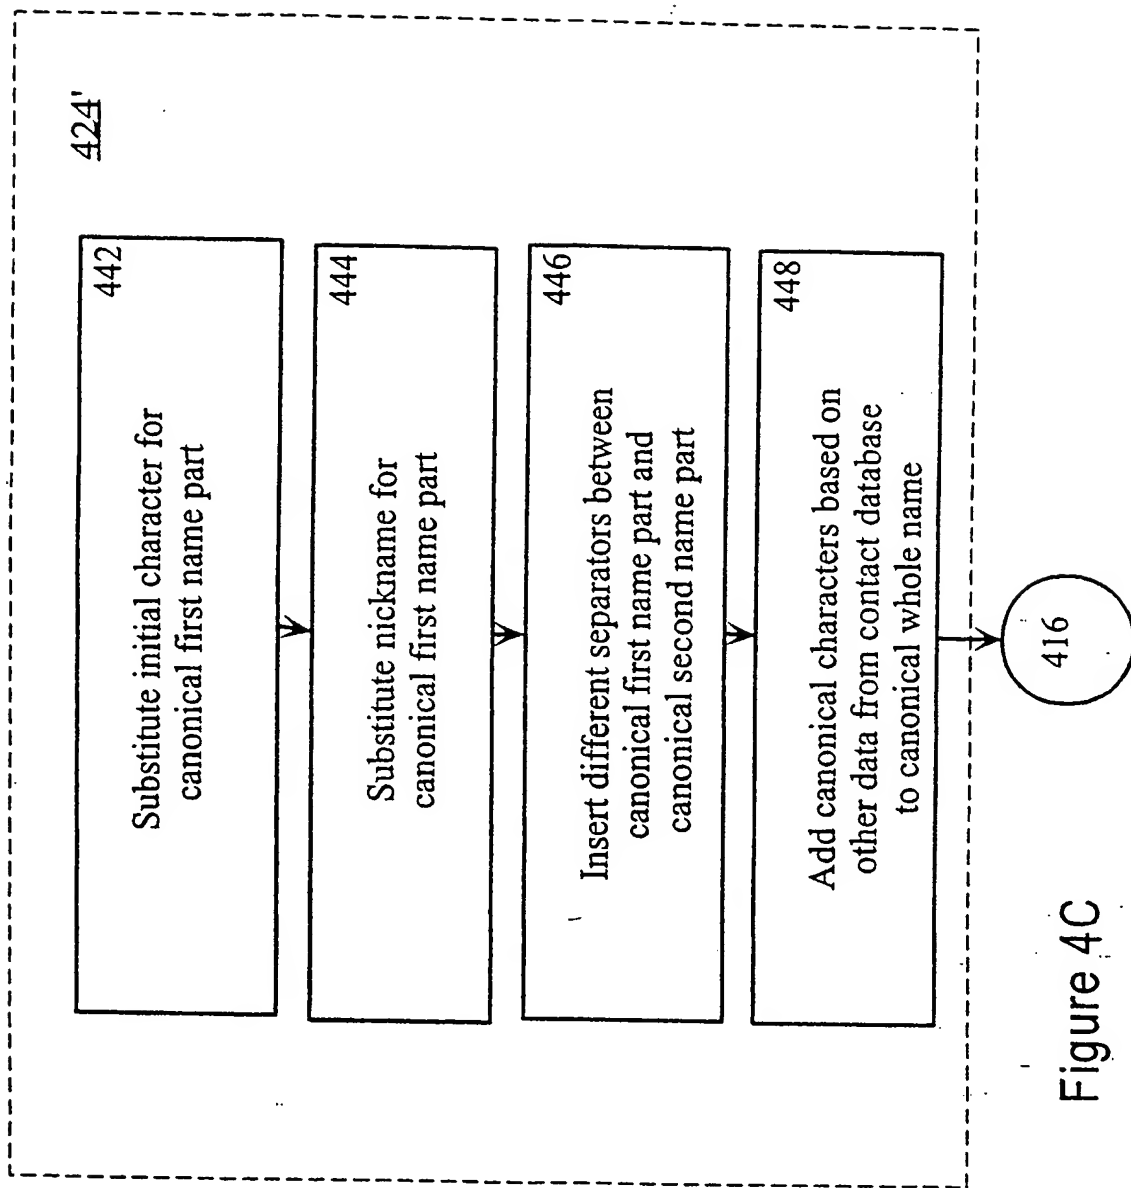


Figure 4C

SUBSTITUTE SHEET (RULE 26)



8/15

550 Promotion	552 contact first name	554 contact last name	556 contact company	558 contact address	560 contact phone #	562 host name	564 IP address
Sweaters Inc Spring 2000	John	Smith	Fancy Store	Central Park, NY	(111) 555-1000	john-smith. sld2.com	w.x.y.z1 570
Sweaters Inc Spring 2000	Mary	Jones	Mom&Pop	Main St., FL	(555) 555-1001	maryjones sld3.com	w.x.y.z1 572
Sweaters Inc Spring 2000	Mary	Smith	Fancy Store	Rodeo Dr. CA	(999) 555-1010	mary-smith. sld4.com	w.x.y.z4 574
Sweaters Inc Spring 2000	John	Jones	Depart. Store	Michigan Ave, IL	(333) 555-1100	john-jones. sld5.com	w.x.y.z4 576
Sweaters Inc Spring 2000	Mary	Smith	Boutique A	Fifth Ave, NY	(111) 555-1111	mary-smith. sld2.com	w.x.y.z1 578
Sweaters Inc Spring 2000	John	Smith	Famous Store	Penn. Ave. DC	(222) 555-1234	john-smith. sld3.com	w.x.y.z1 580
Sweaters Inc Spring 2000	Mary	Smith	Little Shoppe	Bourbon St., LA	(777) 555-1001	mary-smith. sld5.com	w.x.y.z4 582

Figure 5A

SUBSTITUTE SHEET (RULE 26)

9/15

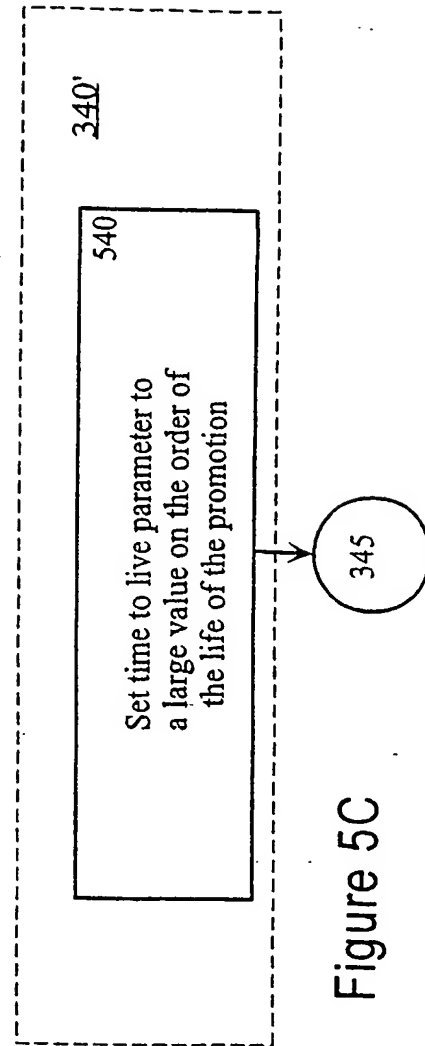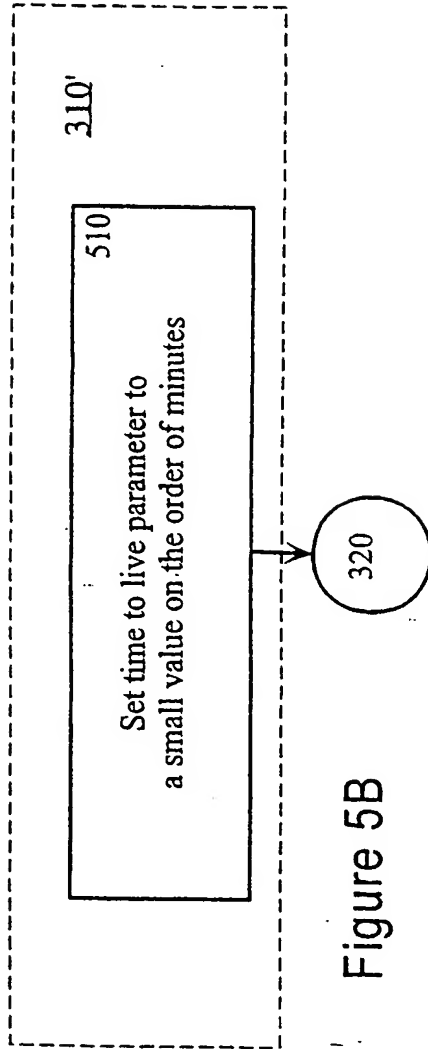

SUBSTITUTE SHEET (RULE 26)

10/15

Figure 6A


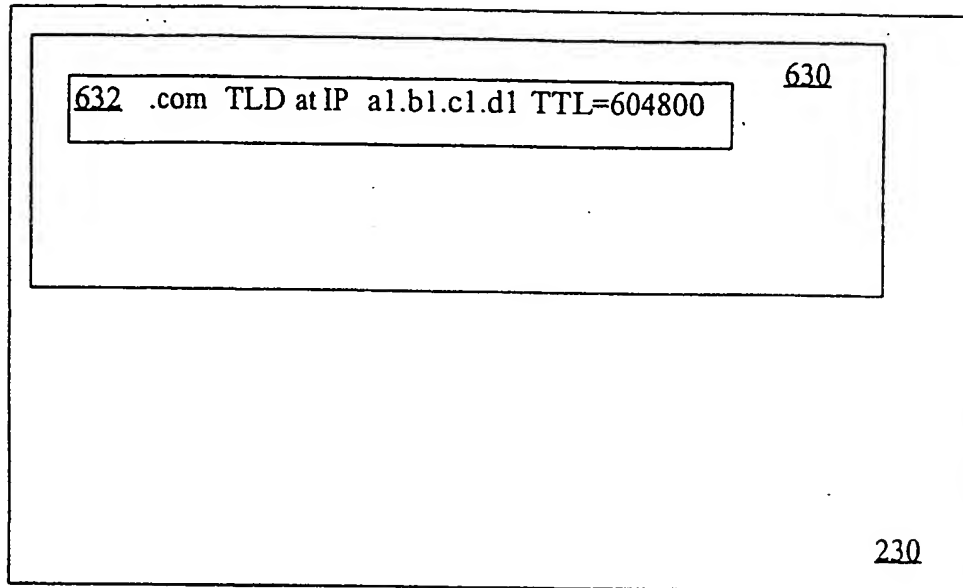


Figure 6B




SUBSTITUTE SHEET (RULE 26)

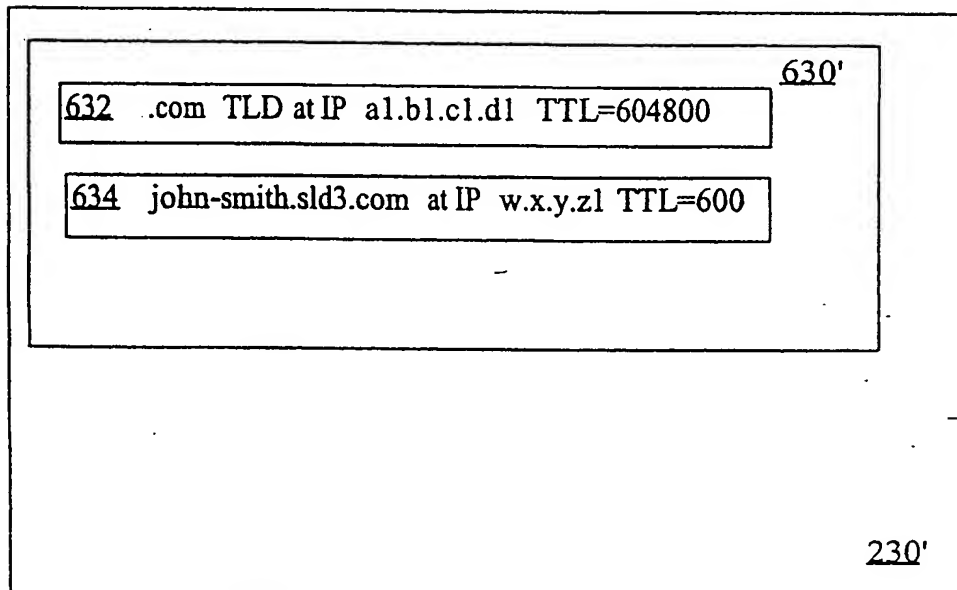

11/15


Figure 7A

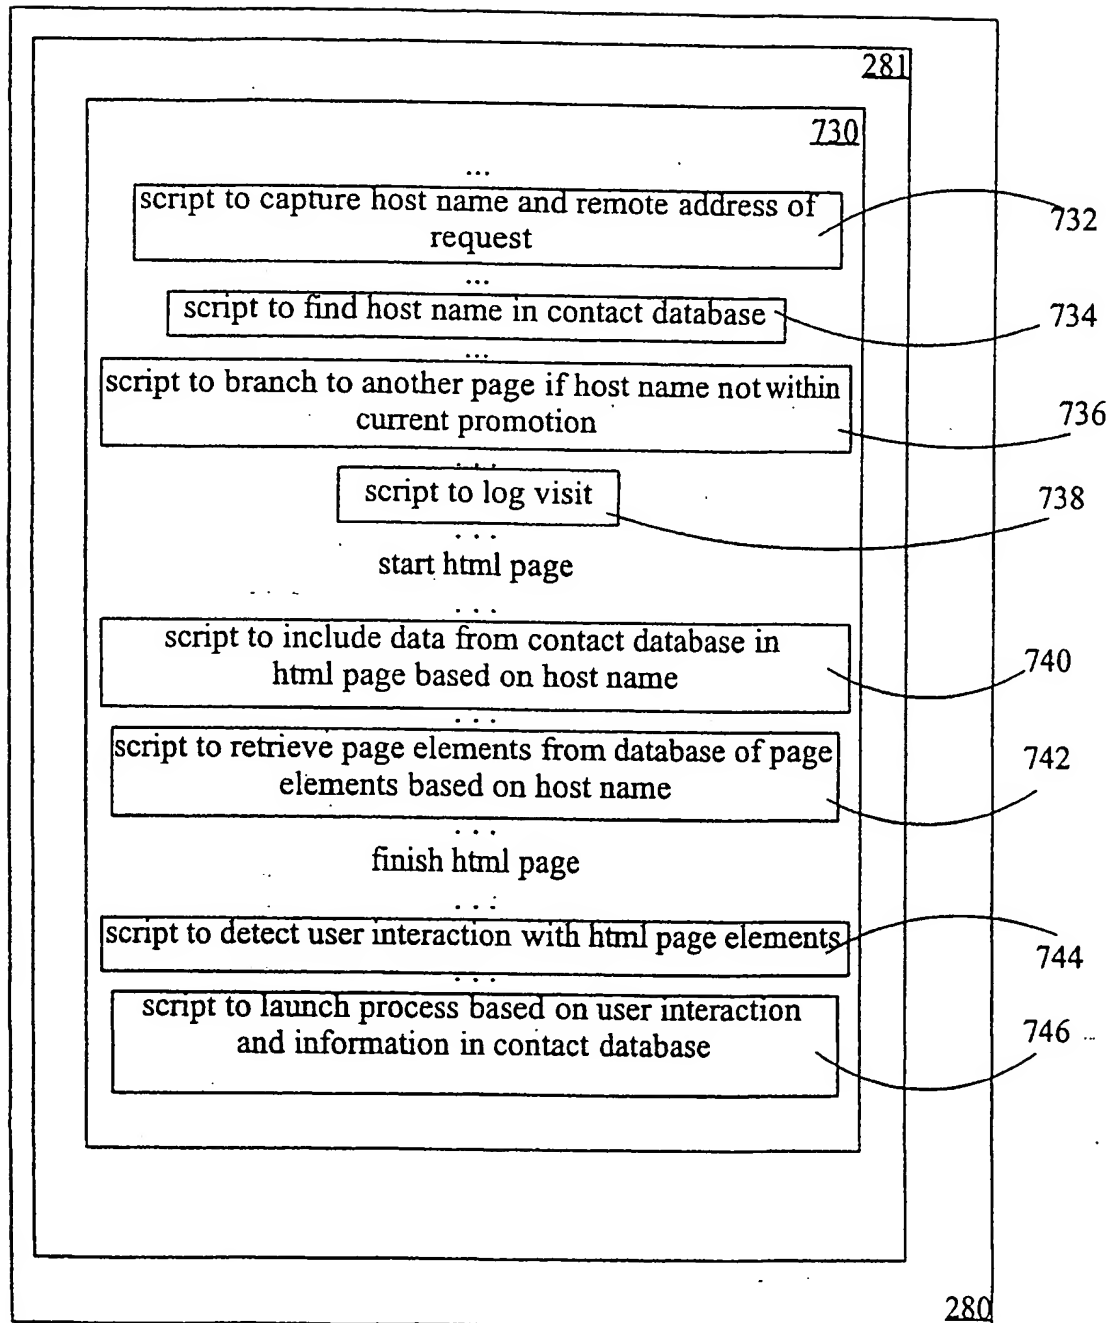

SUBSTITUTE SHEET (RULE 26)


12/15

Figure 7B

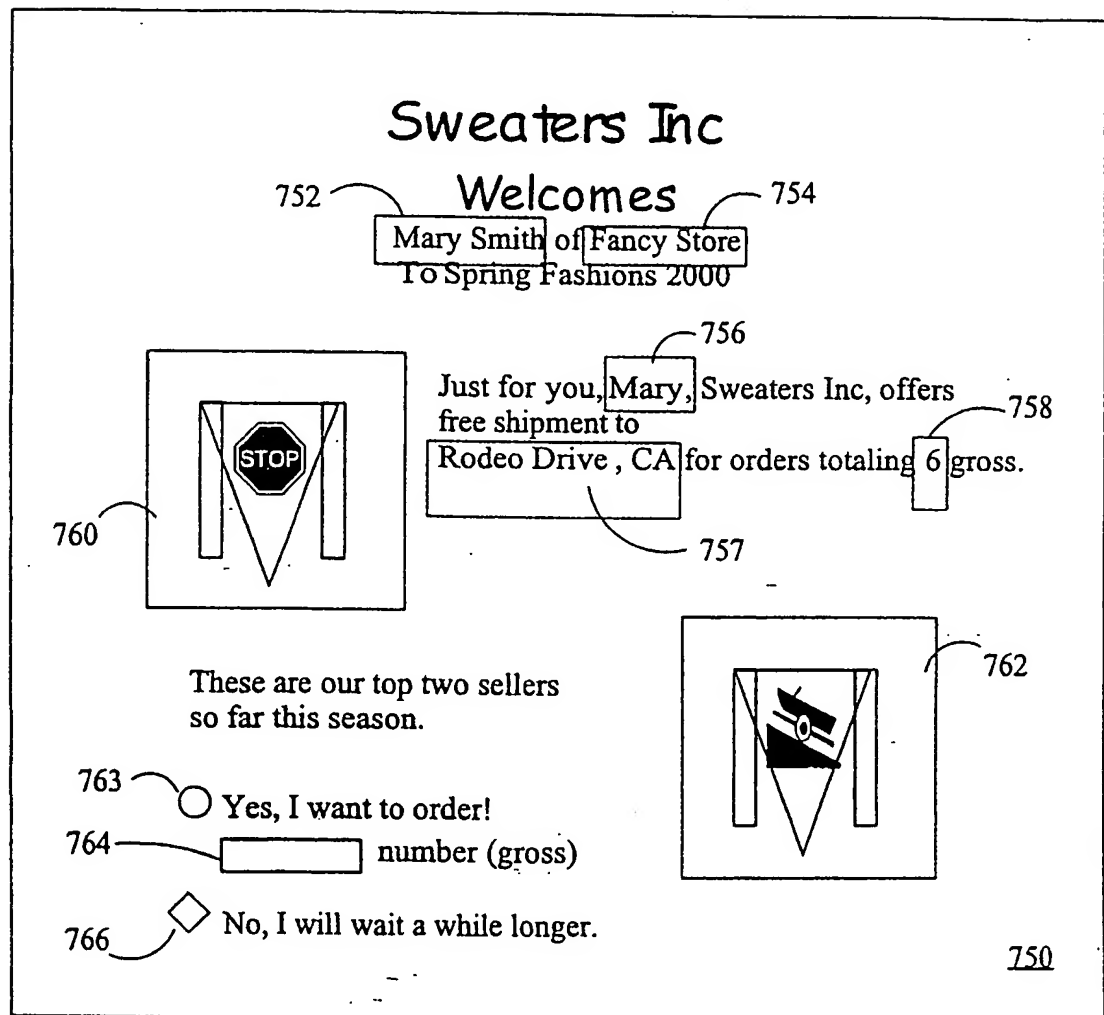

SUBSTITUTE SHEET (RULE 26)

13/15

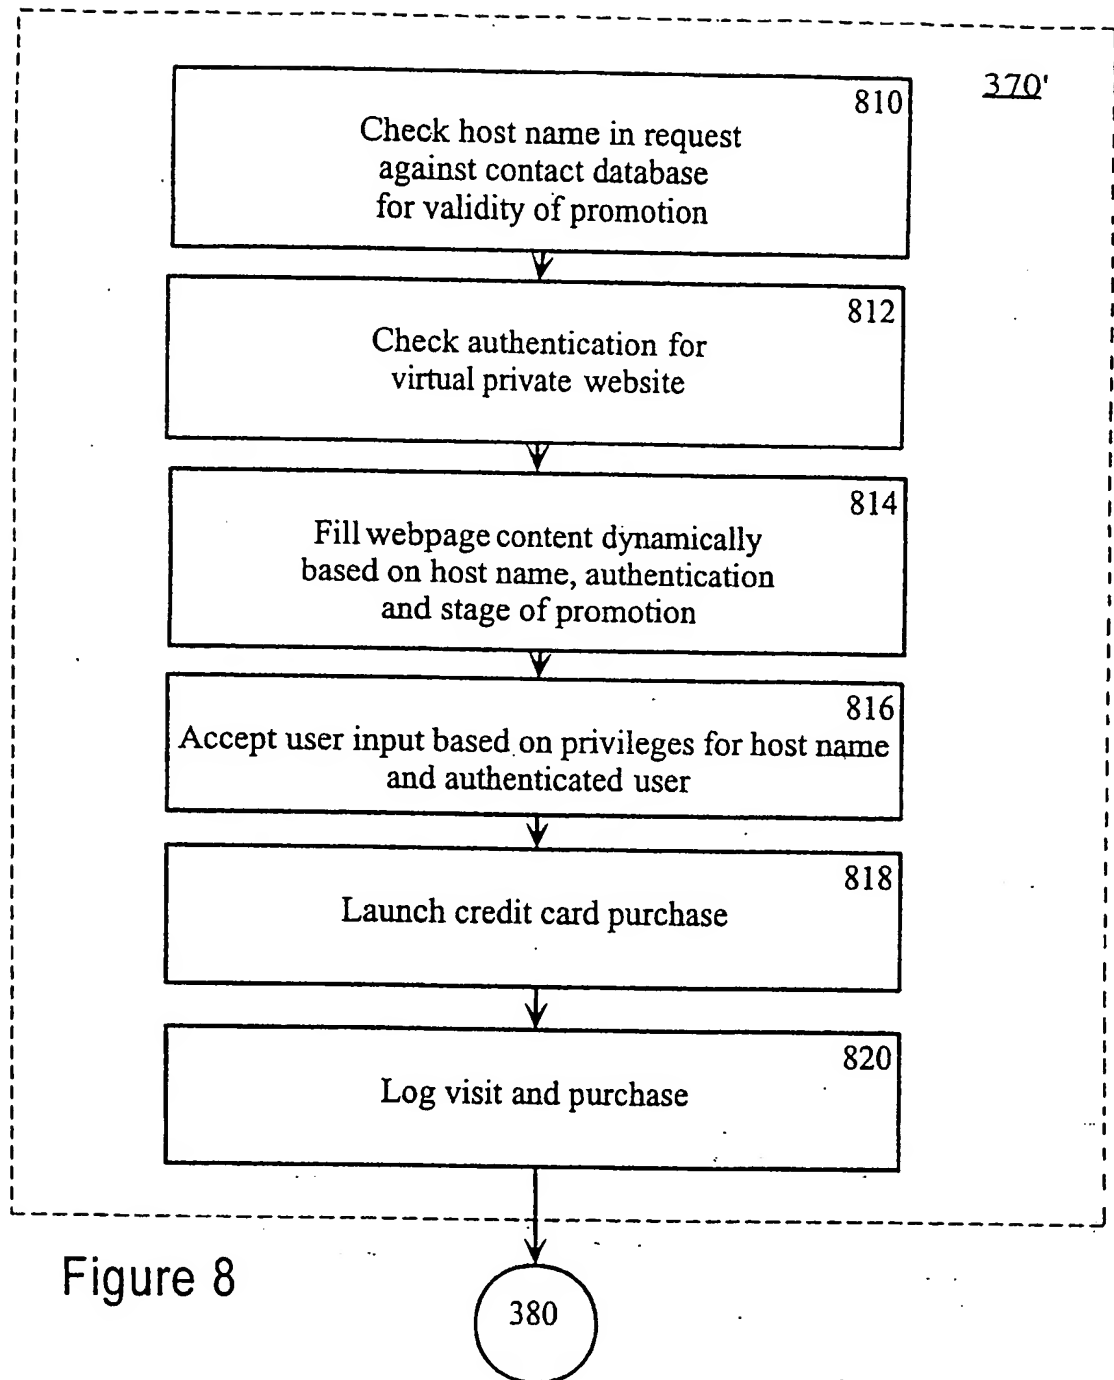

SUBSTITUTE SHEET (RULE 26)

14/15

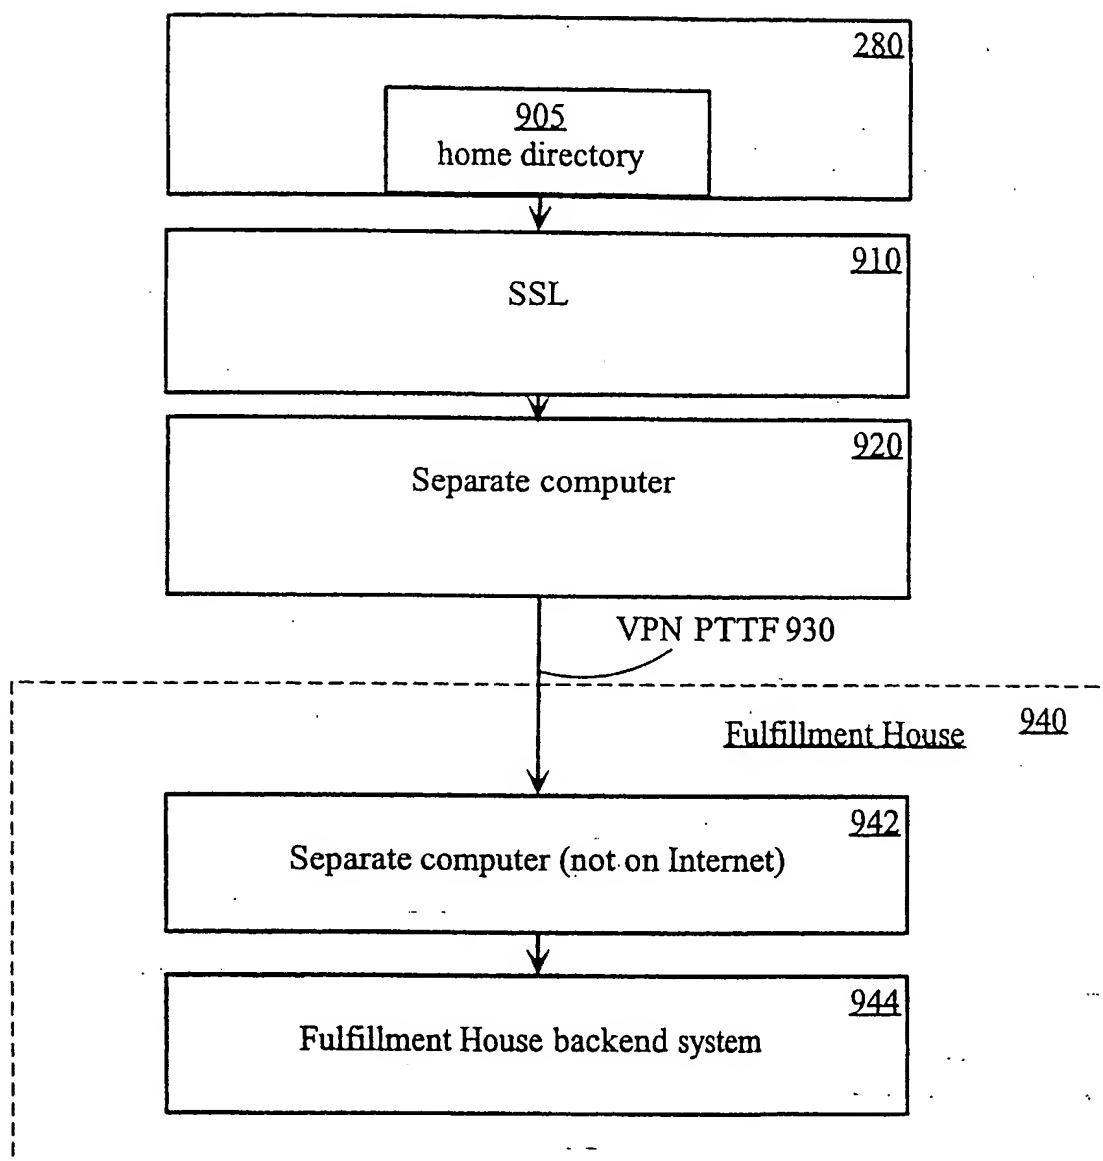


Figure 9

SUBSTITUTE SHEET (RULE 26)

15/15

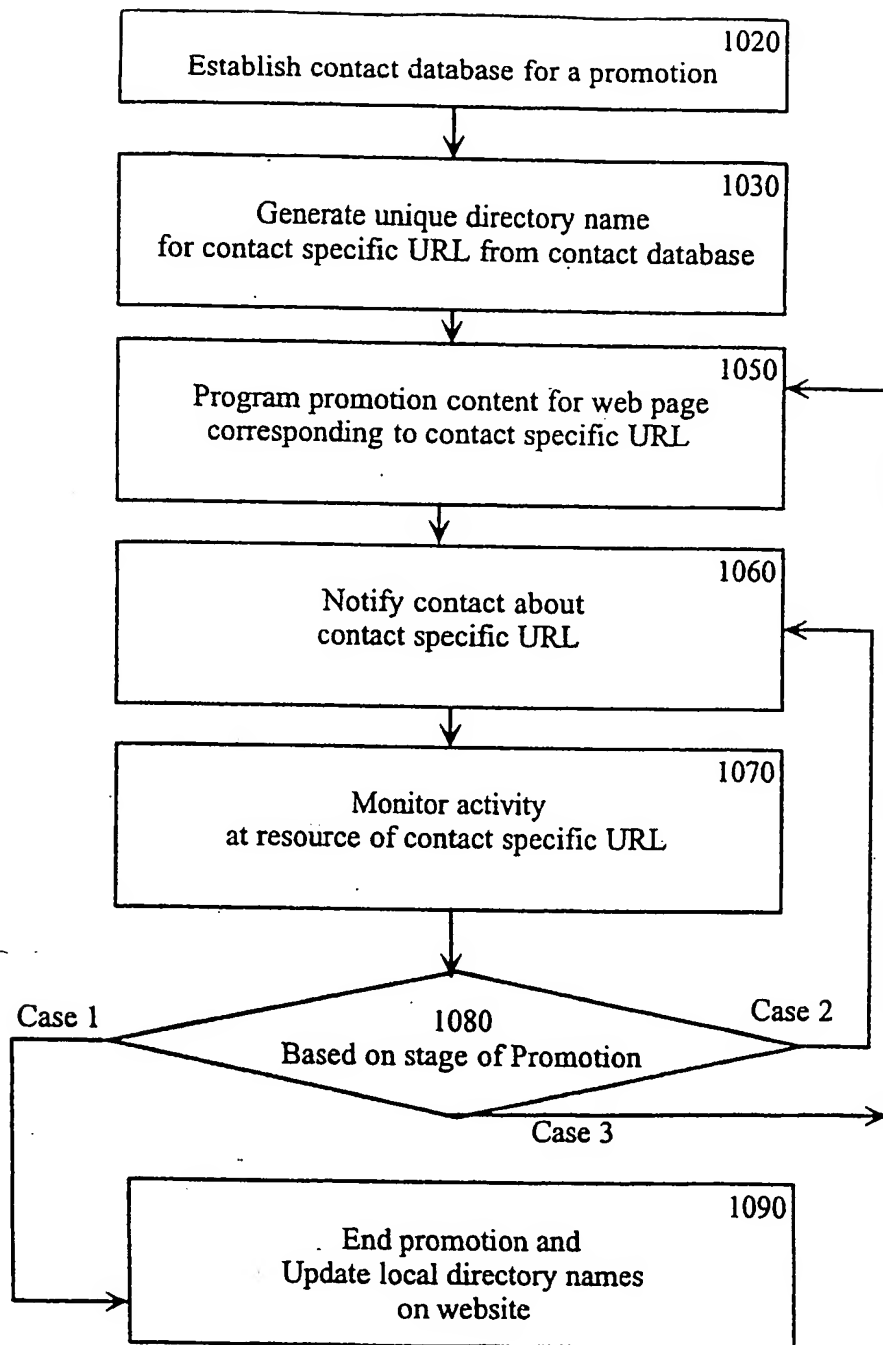


Figure 10

SUBSTITUTE SHEET (RULE 26)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
31 August 2000 (31.08.2000)

PCT

(10) International Publication Number  
WO 00/50969 A3

(51) International Patent Classification<sup>7</sup>: G06F 15/16,  
7/00, 17/30, 17/60

(74) Agents: PRICE, Robert, L., et al.; McDermott, Will &  
Emery, 600 13th Street, N.W., Washington, DC 20005-  
3096 (US).

(21) International Application Number: PCT/US00/04804

(22) International Filing Date: 25 February 2000 (25.02.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/122,087 26 February 1999 (26.02.1999) US

(71) Applicants and


(72) Inventors: HAUGLAND, Henry [US/US]; 24 Arbor Cir-  
cle, Natick, MA 01760 (US). WOLLSCHLAGER, Linda  
[US/US]; 24 Arbor Circle, Natick, MA 01760 (US).

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ,  
BA, BB, BG, BR, BY, CA, CH, CN, CR, CZ, DE, DK, DM,  
EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS,  
JP, KE, KG, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,  
MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU,  
SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ,  
VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent  
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent  
(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,  
MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: MASS GENERATION OF INDIVIDUAL VIRTUAL SERVERS, VIRTUAL WEB SITES AND VIRTUAL WEB OB-  
JECTS

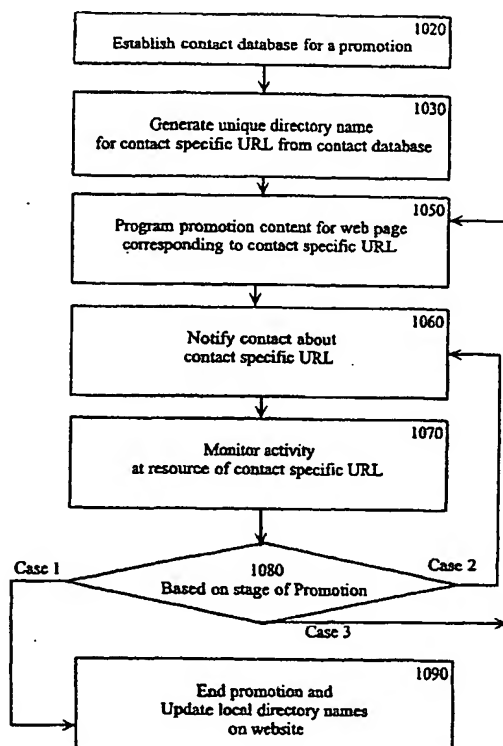

(57) Abstract: Techniques for inducing a contact to invoke a resource prepared by a promoter when the resource resides on a network, includes generating a resource location description for the resource (1030). The resource location description includes a name of the contact. The promoter provides access to the resource at a location on the network according to the resource location description. The promoter also prepares a message to notify the contact about the resource location description (1060). Thus a promoter (e.g., wholesaler, retailer, advocate, charity or politician) can provide a web site for each contact (e.g., customer, potential customer, viewer, supporter or voter) whom the promoter has identified. Each web site can have a domain name that prominently displays the contact's identity. The psychological benefit to the contact of finding a web site devoted to the contact and with the contact's own identity as part of the domain name conditions the contact favorably and increases the chances that the result sought by the promoter will be achieved.

WO 00/50969 A3



**Published:**

— *With international search report.*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(88) Date of publication of the international search report:**

5 April 2001

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US00/04804

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G06F 15/16, 7/00, 17/30, 17/60

US CL : 709/245, 217; 705/14; 707/10

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 709/203, 217, 219, 227, 229, 245; 705/14, 26, 27; 707/10, 104, 513, 530, 539, 540

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
Internet searchElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
Please See Extra Sheet.

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,752,022 A (CHIU et al.) 12 MAY 1998 ABSTRACT, Column 2, Line 62 through Column 3, Line 32, Column 3, Line 40 through Column 5, Line 4	1-33, 42-43, 45-53, 62-63
Y, P	US 6,009,410 A (LEMOLE et al.) 28 DECEMBER 1999 ABSTRACT, Column 1, Line 55 through Column 2, Line 56, Column 3, Lines 28-65, Column 6, Lines 20-45	1-33, 42-43, 45-53, 62-63
Y, P	US 6,029,141 A (BEZOS et al.) 22 FEBRUARY 2000 ABSTRACT, Column 1, Line 48 through Column 2, Line 38, Column 3, Lines 8-42, Column 7, Line 6 through Column 8, Line 48, Column 9, Line 40 through Column 14, Line 11, Column 14, Line 62 through Column 15, Line 16	1-33, 42-43, 45-53, 62-63

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X*	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y*	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A*	document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means		
*P* document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

19 SEPTEMBER 2000

Date of mailing of the international search report

14 NOV 2000

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

MARC THOMPSON

Telephone No. (703) 305-3900

Form PCT/ISA/210 (second sheet) (July 1998)\*



## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US00/04804

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y, P	US 6,085,242 A (CHANDRA) 04 JULY 2000 ABSTRACT, Column 1, Lines 34-41, Column 4, Line 13 through Column 6, Line 65	1-33, 42-43, 45- 53, 62-63
A	US 5,740,430 A (ROSENBERG et al.) 14 APRIL 1998 Entire document	1-33, 42-43, 45- 53, 62-63
A	US 5,793,972 A (SHANE) 11 AUGUST 1998 Entire document	1-33, 42-43, 45- 53, 62-63
A	US 5,822,737 A (OGRAM) 13 OCTOBER 1998 Entire document	1-33, 42-43, 45- 53, 62-63
A, P	US 5,999,914 A (BLINN et al.) 07 DECEMBER 1999 Entire document	1-33, 42-43, 45- 53, 62-63
A, P	US 6,070,142 A (MCDONOUGH et al.) 30 MAY 2000 Entire document	1-33, 42-43, 45- 53, 62-63

Form PCT/ISA/210 (continuation of second sheet) (July 1998)\*

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US00/04804

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Please See Extra Sheet.

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:  
1-33, 42-43, 45-53, and 62-63

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.  
☐ No protest accompanied the payment of additional search fees.

Form PCT/ISA/210 (continuation of first sheet(1)) (July 1998)\*

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US00/04804

### B. FIELDS SEARCHED

Electronic data bases consulted (Name of data base and where practicable terms used):

EAST U.S. patent text search

Terms: customizing URLs, dynamic web page generation, logging user activity with web pages, data addressing, database access, electronic promotion distribution

### BOX II. OBSERVATIONS WHERE UNITY OF INVENTION WAS LACKING

This ISA found multiple inventions as follows:

This application contains the following inventions or groups of inventions which are not so linked as to form a single inventive concept under PCT Rule 13.1. In order for all inventions to be searched, the appropriate additional search fees must be paid.

Group I, claim(s) 1-33, 42-43, 45-53, and 62-63, drawn to inducing retrieval of information over a network.

Group II, claim(s) 38-41, and 58-61, drawn to creating viewable content of remotely located data.

Group III, claim(s) 34-37, 44, 54-57, 64-71, drawn to generation and grouping of virtual proxy server.

The inventions listed as Groups I, II, and III do not relate to a single inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons: The invention groups are drawn towards divergent, distinctly different inventions. Functionality for inducing and processing information retrieval over a network, creating viewable content for presentation from data located on a network, and virtual proxy server generation and establishment of virtual server groups, do not share a common inventive concept.

REVISED VERSION

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
31 August 2000 (31.08.2000)


PCT

(10) International Publication Number  
WO 00/50969 A3

- (51) International Patent Classification?: G06F 15/16, 7/00, 17/30, 17/60
- (21) International Application Number: PCT/US00/04804
- (22) International Filing Date: 25 February 2000 (25.02.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/122,087 26 February 1999 (26.02.1999) US
- (71) Applicants and  
(72) Inventors: HAUGLAND, Henry [US/US]; 24 Arbor Circle, Natick, MA 01760 (US). WOLLSCHLAGER, Linda [US/US]; 24 Arbor Circle, Natick, MA 01760 (US).
- (81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,

[Continued on next page]

(54) Title: MASS GENERATION OF INDIVIDUAL VIRTUAL SERVERS, VIRTUAL WEB SITES AND VIRTUAL WEB OBJECTS

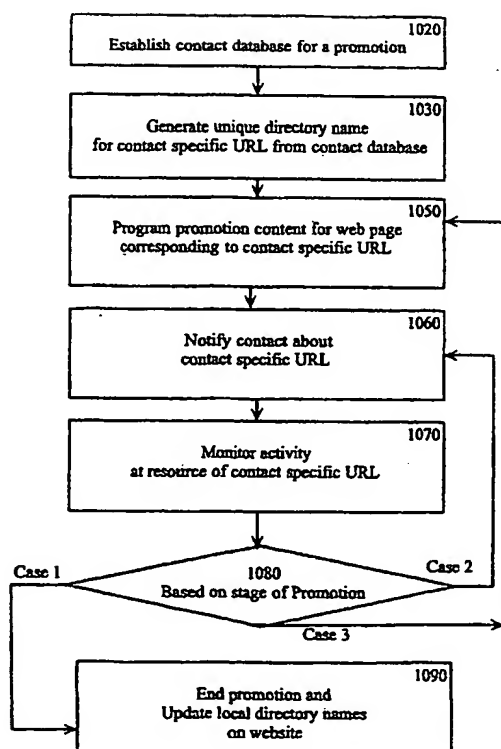

(57) Abstract: Techniques for inducing a contact to invoke a resource prepared by a promoter when the resource resides on a network, includes generating a resource location description for the resource (1030). The resource location description includes a name of the contact. The promoter provides access to the resource at a location on the network according to the resource location description. The promoter also prepares a message to notify the contact about the resource location description (1060). Thus a promoter (e.g., wholesaler, retailer, advocate, charity or politician) can provide a web site for each contact (e.g., customer, potential customer, viewer, supporter or voter) whom the promoter has identified. Each web site can have a domain name that prominently displays the contact's identity. The psychological benefit to the contact of finding a web site devoted to the contact and with the contact's own identity as part of the domain name conditions the contact favorably and increases the chances that the result sought by the promoter will be achieved.

WO 00/50969 A3

MC, NL, PT, SE), OAPI, GA, GN, GW, ML, MR, NE, NI, NG, NO, NZ, OM, PA, PE, PG, PH, PL, PT, RU, SA, SG, SI, SK, SL, SN, SR, ST, SV, TD, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VE, VN, YU, ZA, ZM, ZW.

Publication of the revised international search  
5 July 2001

**Published:**

— *With international search report*

(84) *Without Correction:*

PCT C No. 27/2001 of 5 July 2001, Section II

(88) **Date of publication of the international search report**

For the rules and other abbreviations, refer to the "Guidelines on Claims and Abbreviations" appearing at the beginning of the same issue of the PCT Gazette.

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US00/04804

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) :G06F 15/16, 7/00, 17/30, 17/60

US CL :709/245, 217; 705/14; 707/10

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 709/201, 202, 203, 206, 217, 219, 227, 229, 245; 705/14, 26, 27; 707/10, 104, 513, 530, 539, 540

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
Internet searchElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
Please See Extra Sheet.

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,752,022 A (CHIU et al.) 12 MAY 1998 ABSTRACT, Column 2, Line 62 through Column 3, Line 32, Column 3, Line 40 through Column 5, Line 4	1-33, 42-43, 45-53, 62-63
Y, P	US 6,009,410 A (LEMOLE et al.) 28-DECEMBER 1999 ABSTRACT, Column 1, Line 55 through Column 2, Line 56, Column 3, Lines 28-65, Column 6, Lines 20-45	1-33, 42-43, 45-53, 62-63
Y, P	US 6,029,141 A (BEZOS et al.) 22 FEBRUARY 2000 ABSTRACT, Column 1, Line 48 through Column 2, Line 38, Column 3, Lines 8-42, Column 7, Line 6 through Column 8, Line 48, Column 9, Line 40 through Column 14, Line 11, Column 14, Line 62 through Column 15, Line 16	1-33, 42-43, 45-53, 62-63

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Z" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search  
19 SEPTEMBER 2000

Date of mailing of the international search report

06 APR 2001

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

MARC THOMPSON

Telephone No. (703) 305-3900

Form PCT/ISA/210 (second sheet) (July 1998)\*

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US00/04804

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y, P	US 6,085,242 A (CHANDRA) 04 JULY 2000 ABSTRACT, Column 1, Lines 34-41, Column 4, Line 13 through Column 6, Line 65	1-33, 42-43, 45-53, 62-63
A	US 5,740,430 A (ROSENBERG et al.) 14 APRIL 1998 Entire document	1-33, 42-43, 45-53, 62-63
A	US 5,793,972 A (SHANE) 11 AUGUST 1998 Entire document	1-33, 42-43, 45-53, 62-63
A	US 5,822,737 A (OGRAM) 13 OCTOBER 1998 Entire document	1-33, 42-43, 45-53, 62-63
A, P	US 5,999,914 A (BLINN et al.) 07 DECEMBER 1999 Entire document	1-33, 42-43, 45-53, 62-63
A, P	US 6,070,142 A (MCDONOUGH et al.) 30 MAY 2000 Entire document	1-33, 42-43, 45-53, 62-63
X	US 5,761,673 A (BOOKMAN et al.) 02 JUNE 1998 ABSTRACT, Figures 2-4, Column 1, Line 53 through Column 2, Line 26, Column 3, Line 61 through Column 6, Line 3	38-41, 58-61
Y	US 5,761,507 A (GOVETT) 02 JUNE 1998 ABSTRACT, Figures 1-3, Column 3, Lines 17-64, Column 4, Lines 26-58, Column 5, Line 26 through Column 6, Line 52, Column 11, Lines 25-67	34-37, 54-57, 65-69, 71-75, 78
Y	US 6,003,083 A (DAVIES et al.) 14 DECEMBER 1999 Figures 1-7, Column 2, Lines 25-39, Column 2, Line 59 through Column 3, Line 14, Column 5, Line 31 through Column 6, Line 21, Column 7, Lines 17-21, Column 7, Lines 42-53	34-37, 44, 54-57, 65-69, 71-75, 78
Y	US 6,014,634 A (SCROGGIE et al.) 11 JANUARY 2000 Figures 15-17, Column 1, Line 45 through Column 2, Line 7, Column 2, Line 65 through Column 3, Line 50, Column 3, Line 66 through Column 4, Line 19, Column 12, Lines 30-64, Column 13, Line 7 through Column 14, Line 28, Column 14, Lines 46-65	34-37, 44, 54-57, 65-69, 71-75, 78
A	US 5,897,622 A (BLINN et al.) 27 APRIL 1999 Entire document	34-41, 44, 54-61, 64-78

Form PCT/ISA/210 (continuation of second sheet) (July 1998)\*

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US00/04804

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☐ Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
  
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Please See Extra Sheet.

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
  
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

Form PCT/ISA/210 (continuation of first sheet(1)) (July 1998)\*



# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US00/04804

## B. FIELDS SEARCHED

Electronic data bases consulted (Name of data base and where practicable terms used):

EAST U.S. patent text search

Terms: customizing URLs, dynamic web page generation, logging user activity with web pages, data addressing, database access, electronic promotion distribution, dynamic web page generation, virtual networks, network proxy(ies), server spawning, server groups, domain name servers (DNS), naming service, address resolution

## BOX II. OBSERVATIONS WHERE UNITY OF INVENTION WAS LACKING

This ISA found multiple inventions as follows:

This application contains the following inventions or groups of inventions which are not so linked as to form a single inventive concept under PCT Rule 13.1. In order for all inventions to be searched, the appropriate additional search fees must be paid.

Group I, claim(s) 1-33, 42-43, 45-53, and 62-63, drawn to inducing retrieval of information over a network.

Group II, claim(s) 38-41, and 58-61, drawn to creating viewable content of remotely located data.

Group III, claim(s) 34-37, 44, 54-57, 64-78, drawn to generation and grouping of virtual proxy server.

The inventions listed as Groups I, II, and III do not relate to a single inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons: The invention groups are drawn towards divergent, distinctly different inventions. Functionality for inducing and processing information retrieval over a network, creating viewable content for presentation from data located on a network, and virtual proxy server generation and establishment of virtual server groups, do not share a common inventive concept.

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☒ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**